



REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2015/11/06
1.10	NEW DRAWING FRAME	2024/05/20



RECOMMENDED
PCB LAYOYT

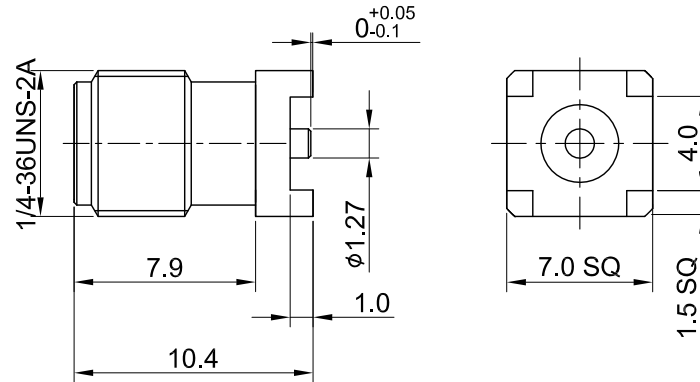

MECHANICAL DATA
DURABILITY : 500 CYCLES
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~12.4GHz
IMPEDANCE : 50Ω
VSWR : 1.3 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1000V
INSULATION RESISTANCE : 5000 MΩ MIN

03	CENTER PIN	Be.Cu	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/05/20	
SMA(F)st.for PCB(SMT)		CHK'D BY: Chilli		2024/05/20	
DWG NO. C02AN3148		REVISIONS		REV.	
CUST. P/N: N/A		GENERAL TOLERANCES		DA2405200002	
DWG NO: N/A		.X ±0.2		1.10	
SHEET 1 of 1		.XX ±0.2			
Unit: mm		.XXX ±0.2			
		ANGLES N/A			

