



REV	DESCRIPTION	DATE
1.10	Chg 2.5 w. 3, 8.5 w. 7.5, ϕ 1.5 w. ϕ 1.6, chg pin material	2020/02/20
1.20	NEW DRAWING FRAME	2023/12/26



RECOMMENDED STRIP LENGTHS

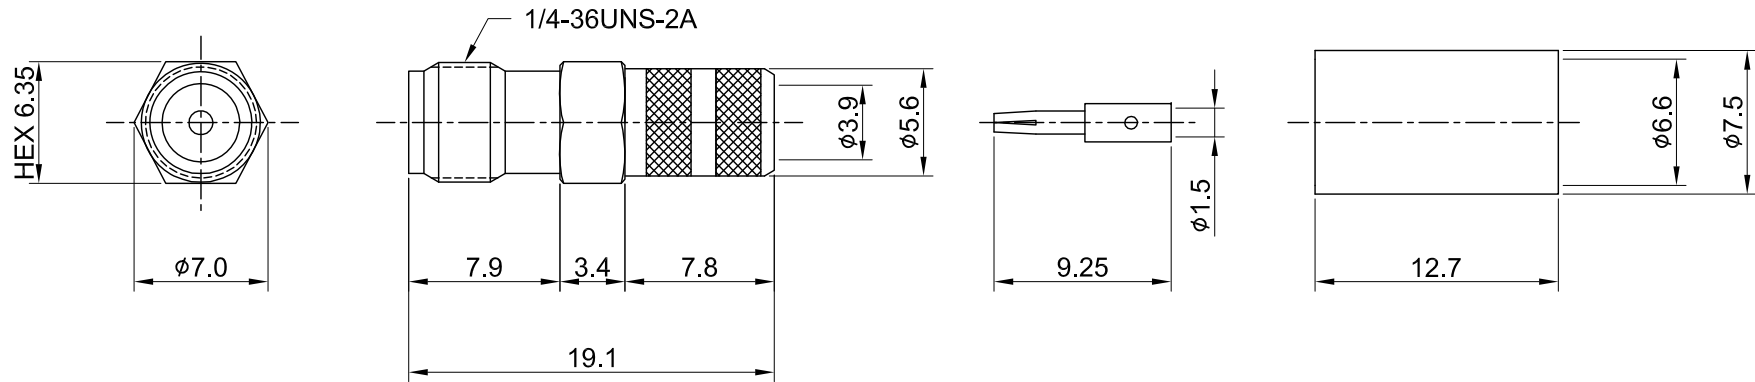

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC ~ 6GHz
 IMPEDANCE : 50 Ω
 VSWR : 1.3 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1000V
 INSULATION RESISTANCE : 5000 M Ω MIN

04	FERRULE	BRASS	GOLD	1
03	INSULATOR	TEFLON	NONE	1
02	PIN	Be Cu	GOLD	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE SMA Straight Jack Crimp for LMR240 Cable			
DWG NO. C02AA31L24012			
CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES .X \pm 0.2 .XX \pm 0.2 .XXX \pm 0.2 ANGLES N/A	DRAWN BY: Lottie 2023/12/26 CHK'D BY: Kelly 2023/12/26
SHEET 1 of 1	Unit: mm		REV. 1.20 DA2312180014