



REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2013/07/05
1.10	CORRECT CONTACT MATERIAL Be Cu	2023/12/26




RECOMMENDED STRIP LENGTHS

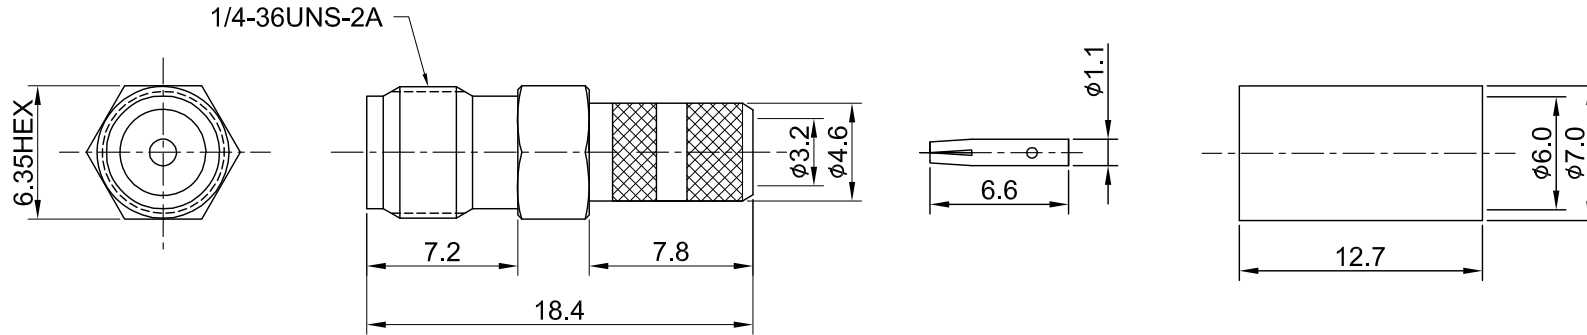

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC ~ 6GHz
 IMPEDANCE : 50Ω
 VSWR : 1.3 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1000V
 INSULATION RESISTANCE : 5000 MΩ MIN

04	FERRULE	BRASS	GOLD	1
03	CENTER CONTACT	Be Cu	GOLD	1
02	BODY	BRASS	GOLD	1
01	INSULATOR	TEFLON	NONE	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:	
SMA Straight Jack Crimp For RG223		Lottie	2023/12/26
DWG NO. C02AA31223012		CHK'D BY:	Kelly 2023/12/26
CUST. P/N: N/A DWG NO: N/A			
SHEET 1 of 1 Unit: mm		GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	
		DA2312180006 REV. 1.10	