



REV	DESCRIPTION	DATE
1.20	NEW DRAWING FRAME	2023/07/13
1.21	CORRECT INSULATION RESISTANCE UNIT	2024/01/02




RECOMMENDED STRIP LENGTHS

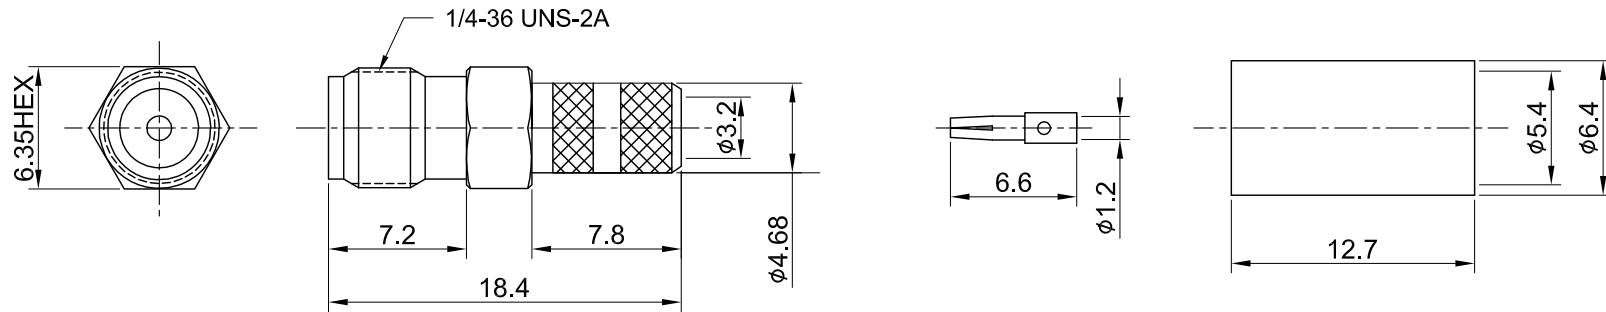

MECHANICAL DATA  
 DURABILITY : 500 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~6GHZ  
 IMPEDANCE : 50Ω  
 VSWR : 1.3 MAX.  
 WORKING VOLTAGE : AC 500V  
 WITHSTANDING VOLTAGE : AC 1000V  
 INSULATION RESISTANCE : 5000 MΩ MIN

04	FERRULE	BRASS	NICKEL	1
03	PIN	Be.Cu	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE	
SMA(F) st. crimp for LMR200(Nickel)	
DWG NO. C02CA31L20012	
CUST. P/N: N/A DWG NO: N/A	
SHEET 1 of 1	Unit: mm
GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	
DRAWN BY: Kelly 2024/01/02 CHK'D BY: Maria 2024/01/02	
DA2312270011 REV. 1.21	