



| REV | DESCRIPTION | DATE |
|------|---|------------|
| 1.00 | INITIAL DESIGN | 2012/03/21 |
| 1.10 | CHG $\phi 4.6/2.3/8.0$ W. $\phi 4.65/2.0/7.5$ | 2024/01/02 |





RECOMMENDED STRIP LENGTHS

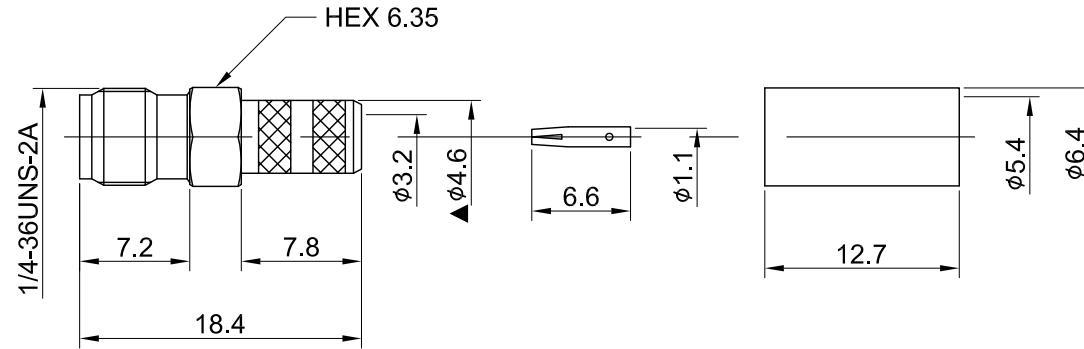

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHZ
 IMPEDANCE : 50Ω
 VSWR : 1.3 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1000V
 INSULATION RESISTANCE : 5000 MΩ MIN

| | | | | |
|----|-------------|----------|--------|------|
| 04 | FERRULE | BRASS | NICKEL | 1 |
| 03 | CENTER PIN | Be.Cu | GOLD | 1 |
| 02 | INSULATOR | TEFLON | NONE | 1 |
| 01 | BODY | BRASS | NICKEL | 1 |
| NO | DESCRIPTION | MATERIAL | FINISH | Q'TY |

| TITLE | |
|--|--|
| SMA(F) st. crimp for RG58 (Ni) | |
| DWG NO. C02CA31058A12 |  |
| CUST. P/N: N/A DWG NO: N/A | |
| SHEET 1 of 1 | Unit: mm |
| GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A | DRAWN BY: Kelly 2024/01/02 CHK'D BY: Maria 2024/01/02  REV. 1.10 DA2312270006 |