



REV	DESCRIPTION	DATE
1.10	NEW DRAWING FRAME	2023/06/06
1.11	CORRECT INSULATION RESISTANCE	2024/01/24

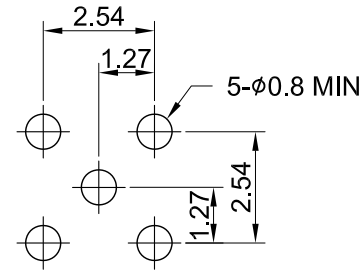

RECOMMENDED  
PCB LAYOUT

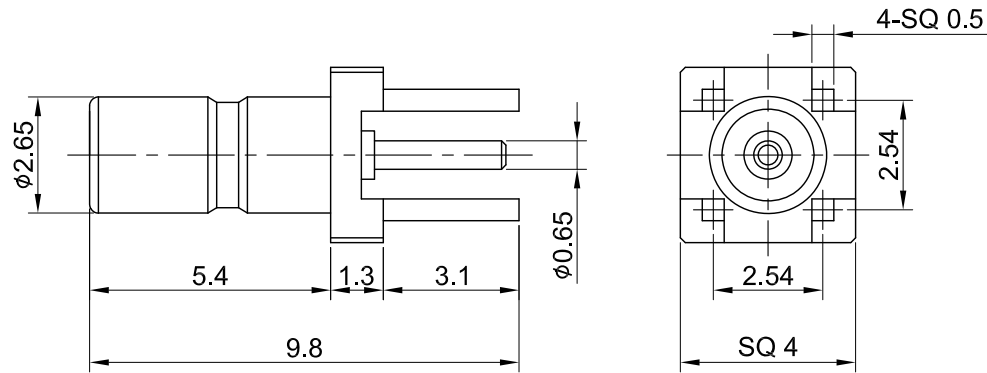

MECHANICAL DATA  
TEMPERATURE RANGE : -65°C ~ + 165°C

DIELECTRICAL DATA  
FREQUENCY RANGE: DC~4GHz  
IMPEDANCE : 50Ω  
VSWR : 1.5 MAX.  
WORKING VOLTAGE : AC 175V  
WITHSTANDING VOLTAGE : AC 500V  
INSULATION RESISTANCE : 1000 MΩ MIN

03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:	
SSMB(F) st. PCB type		Lottie	2024/01/24
DWG NO.		CHK'D BY:	
C12AN3F03		Dora	2024/01/24
CUST. P/N: N/A			
DWG NO: N/A			
SHEET 1 of 1			
Unit: mm		REV. 1.11	
		DA2401030030	

GENERAL TOLERANCES	
.X	±0.2
.XX	±0.2
.XXX	±0.2
ANGLES	N/A