



REV	DESCRIPTION	DATE
1.10	CHG $\phi 4.0$ W. $\phi 3.9$	2023/06/20
1.11	CORRECT INSULATION RESISTANCE	2024/05/16



RECOMMENDED STRIP LENGTHS

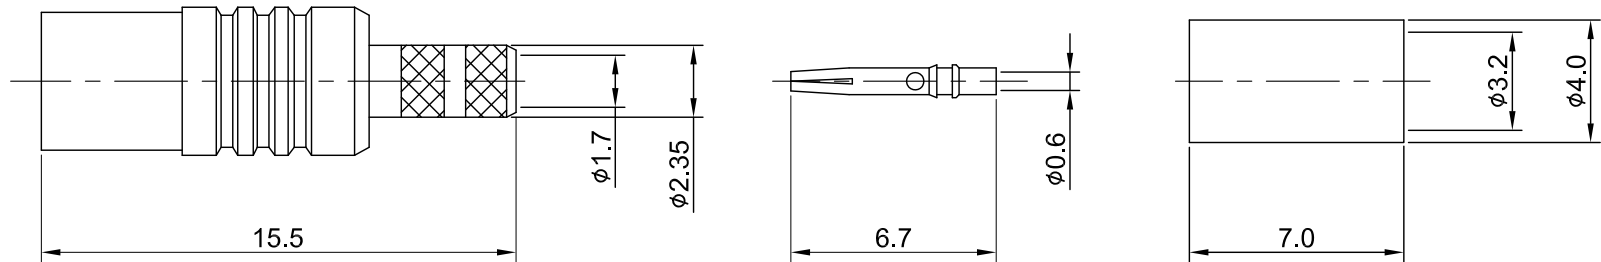

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHz
 IMPEDANCE : 50Ω
 VSWR : 1.3 MAX.
 WORKING VOLTAGE : AC 375V
 WITHSTANDING VOLTAGE : AC 750V
 INSULATION RESISTANCE : 5000 MΩ MIN

04	FERRULE	BRASS	GOLD	1
03	INSULATOR	TEFLON	NONE	1
02	CENTER CONTACT	Be.Cu	GOLD	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:	
MCX(F)st. crimp for RD316		Lottie	2024/05/16
DWG NO. C08AA31316D08		CHK'D BY:	Kelly 2024/05/16
CUST. P/N: N/A DWG NO: N/A			
SHEET 1 of 1 Unit: mm		GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	REV. 1.11