


REV	DESCRIPTION	DATE
1.10	NEW DRAWING FRAME	2023/06/26
1.20	CORRECT INSULATION RESISTANCE	2023/11/21

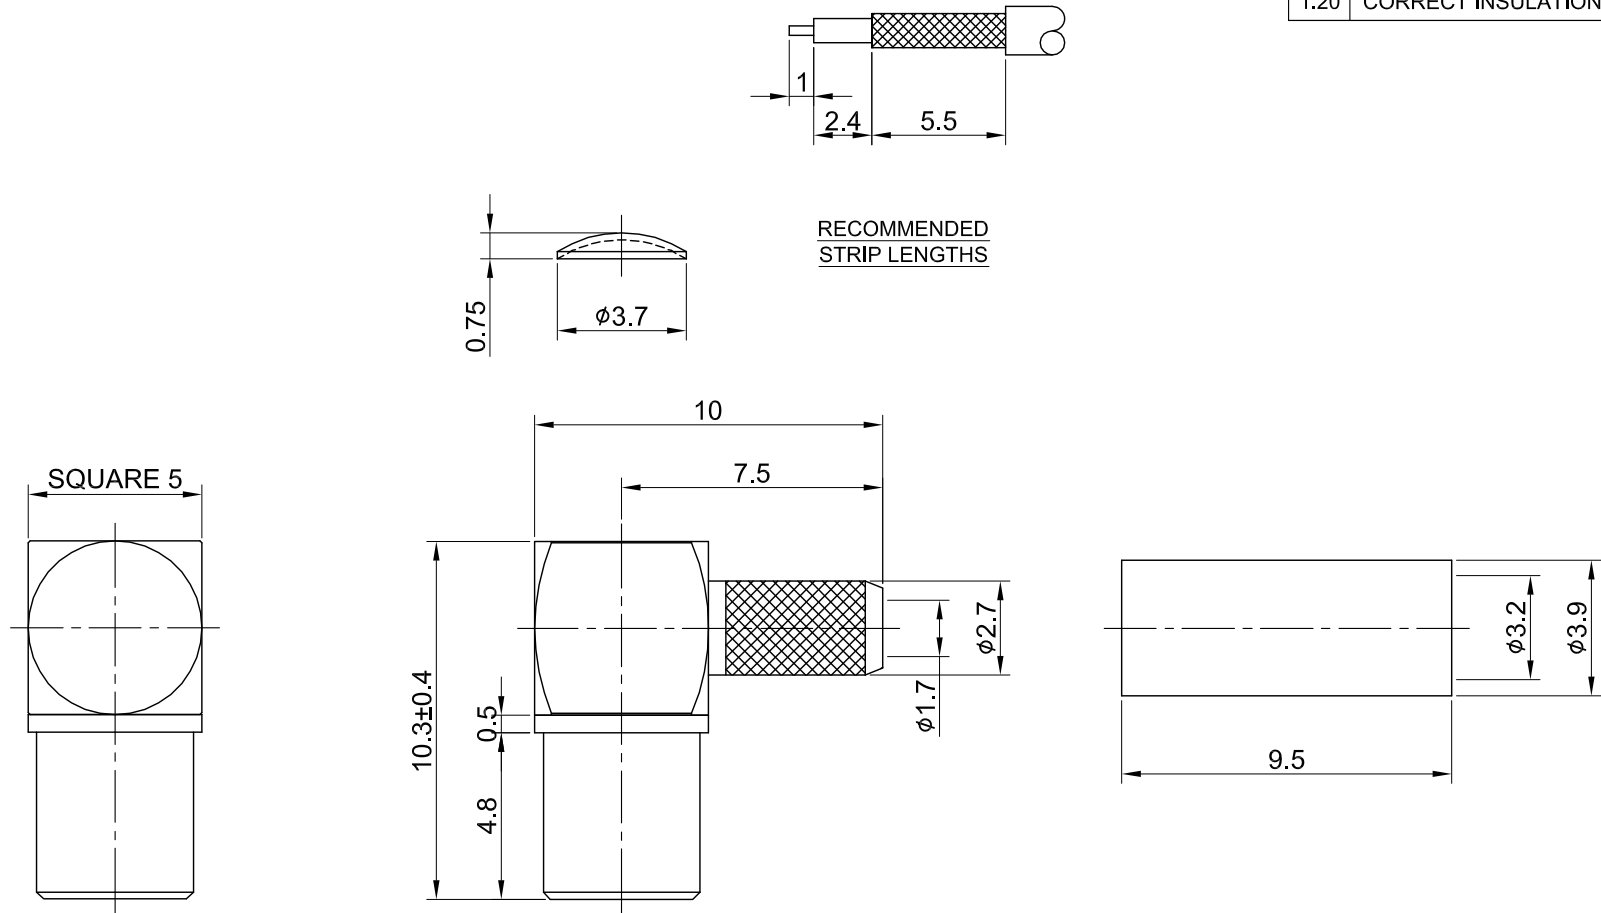

RECOMMENDED STRIP LENGTHS

MECHANICAL DATA  
 DURABILITY : 100 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~3GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.5 MAX.  
 WORKING VOLTAGE : AC 335V  
 WITHSTANDING VOLTAGE : AC 500V  
 INSULATION RESISTANCE : 1000 MΩ MIN

06	FERRULE	BRASS	GOLD	1
05	BODY B	BRASS	GOLD	1
04	INSULATOR	TEFLON	NONE	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	BODY A	BRASS	GOLD	1
01	COVER	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:		CHK'D BY:		REV.	
MCX(F) ra. crimp type for RG179, 75ohm		Lottie	2023/11/21	Dora	2023/11/21	1.20	
DWG NO. C08PA3F179009		GENERAL TOLERANCES		DA2311160030			
CUST. P/N: N/A DWG NO: N/A		.X ±0.2	.XX ±0.2	ANGLES N/A			
SHEET 1 of 1	Unit: mm						

