



REV	DESCRIPTION	DATE
1.20	NEW DRAWING FRAME	2023/06/29
1.30	CORRECT INSULATION RESISTANCE	2023/11/15

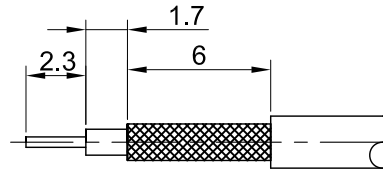

RECOMMENDED STRIP LENGTHS

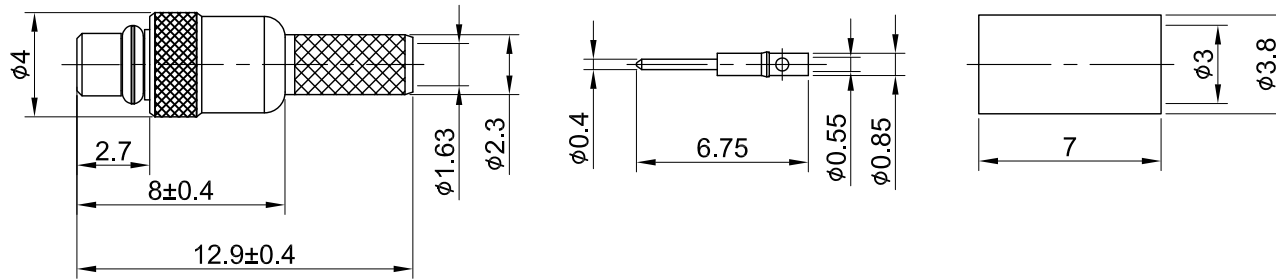

MECHANICAL DATA
 DURABILITY : 100 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHz
 IMPEDANCE : 50Ω
 VSWR : DC~3GHz : 1.3 MAX.
 3.01~6GHz : 1.5 MAX.
 WORKING VOLTAGE : AC 170V
 WITHSTANDING VOLTAGE : AC 500V
 INSULATION RESISTANCE : 1000 MΩ MIN

06	FERRULE	BRASS	GOLD	1
05	PIN	BRASS	GOLD	1
04	BODY B	BRASS	GOLD	1
03	INSULATOR	TEFLON	NONE	1
02	BODY A	BRASS	GOLD	1
01	C-RING	Be.Cu	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:		DATE	
MMCX(M) st. crimp for RG174		Lottie	2023/11/15		
DWG NO. C05AA3F174003		CHK'D BY:	Kana	2023/11/15	
CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES		REVISIONS	
SHEET 1 of 1		.X ±0.2		①	
Unit: mm		.XX ±0.2		REV. 1.30	
		.XXX ±0.2		DA2311130027	
		ANGLES N/A			

