


REV	DESCRIPTION	DATE
2.20	NEW DRAWING FRAME	2023/06/30
2.30	CORRECT INSULATION RESISTANCE	2023/11/16
2.31	REMOVE DURABILITY	2024/01/02

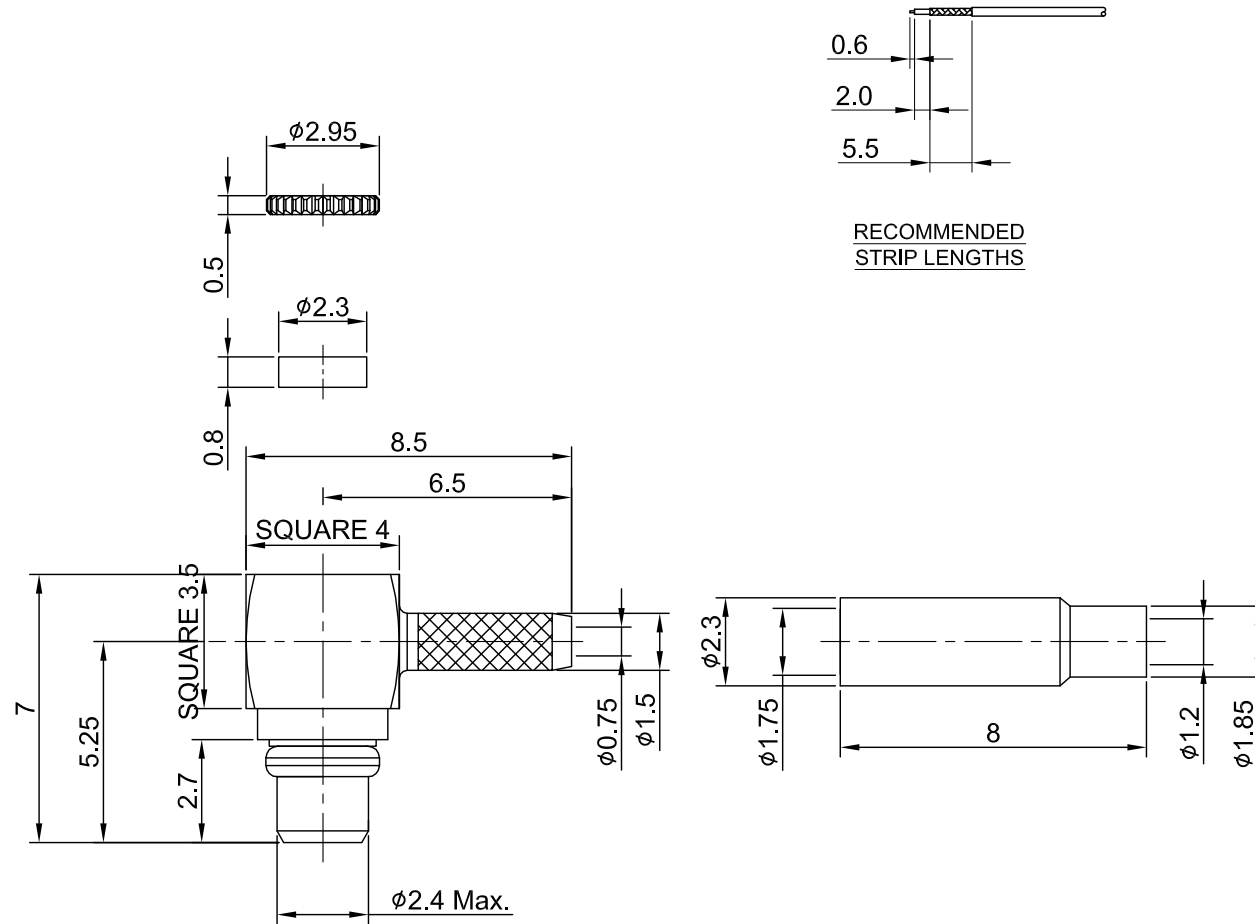

RECOMMENDED STRIP LENGTHS

MECHANICAL DATA
TEMPERATURE RANGE : -40°C ~ + 85°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6 GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 170V
WITHSTANDING VOLTAGE : AC 500V
INSULATION RESISTANCE : 1000 MΩ MIN

07	FERRULE	BRASS	GOLD	1
06	CENTER PIN	BRASS	GOLD	1
05	C RING	Be.Cu	GOLD	1
04	INSULATOR	TEFLON	NONE	1
03	BODY	BRASS	GOLD	1
02	INSULATOR COVER	POM	NONE	1
01	COVER	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/01/02	
MMCX Right Angle Plug Crimp for 1.13 Cable		CHK'D BY: Eileen		2024/01/02	
DWG NO. C05BA3F113001		CUST. P/N: N/A		DWG NO: N/A	
SHEET 1 of 1		Unit: mm		DA2401020002	
GENERAL TOLERANCES		DRAWN BY: Kelly		2024/01/02	
.X ±0.2		CHK'D BY: Eileen		2024/01/02	
.XX ±0.2		REVISION		REV. 2.31	
.XXX ±0.2		DA2401020002		2.31	
ANGLES N/A		DA2401020002		2.31	

