



REV	DESCRIPTION	DATE
1.30	CHG $\phi 3.2$ W. $\phi 3.1$	2023/05/11
1.31	UPDATE INSULATION RESISTANCE	2023/10/04



RECOMMENDED STRIP LENGTHS

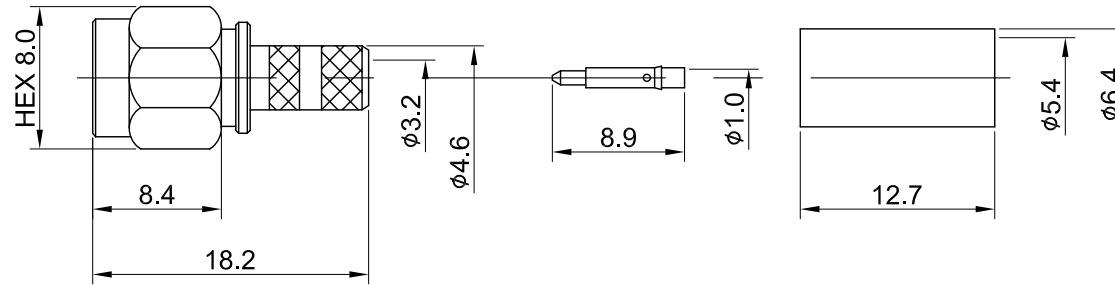

MECHANICAL DATA  
TEMPERATURE RANGE : -65°C ~ + 165°C

DIELECTRICAL DATA  
FREQUENCY RANGE: DC~6GHz  
IMPEDANCE : 50Ω  
VSWR : 1.35 MAX.  
WORKING VOLTAGE : AC 500V  
WITHSTANDING VOLTAGE : AC 1000V  
INSULATION RESISTANCE : 5000 MΩ MIN

06	FERRULE	BRASS	GOLD	1
05	INNER RETAINING RING	Be. Cu	NONE	1
04	GASKET	SILICONE RUBBER	NONE	1
03	INSULATOR	TEFLON	NONE	1
02	PIN	BRASS	GOLD	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		
SMA(M) st. crimp type for RG58		
DWG NO.	C01AA31058A04A	
CUST. P/N:	N/A	
DWG NO:	N/A	
SHEET	1 of 1	Unit: mm
GENERAL TOLERANCES	DRAWN BY: Kelly 2023/10/04	
.X ±0.2	CHK'D BY: David 2023/10/04	
.XX ±0.2	REV. 1.31	
.XXX ±0.2	DA2310040004	
ANGLES N/A		

