


REV	DESCRIPTION	DATE
1.20	NEW DRAWING FRAME	2023/07/26
1.21	CORRECT INSULATION RESISTANCE UNIT	2023/12/21

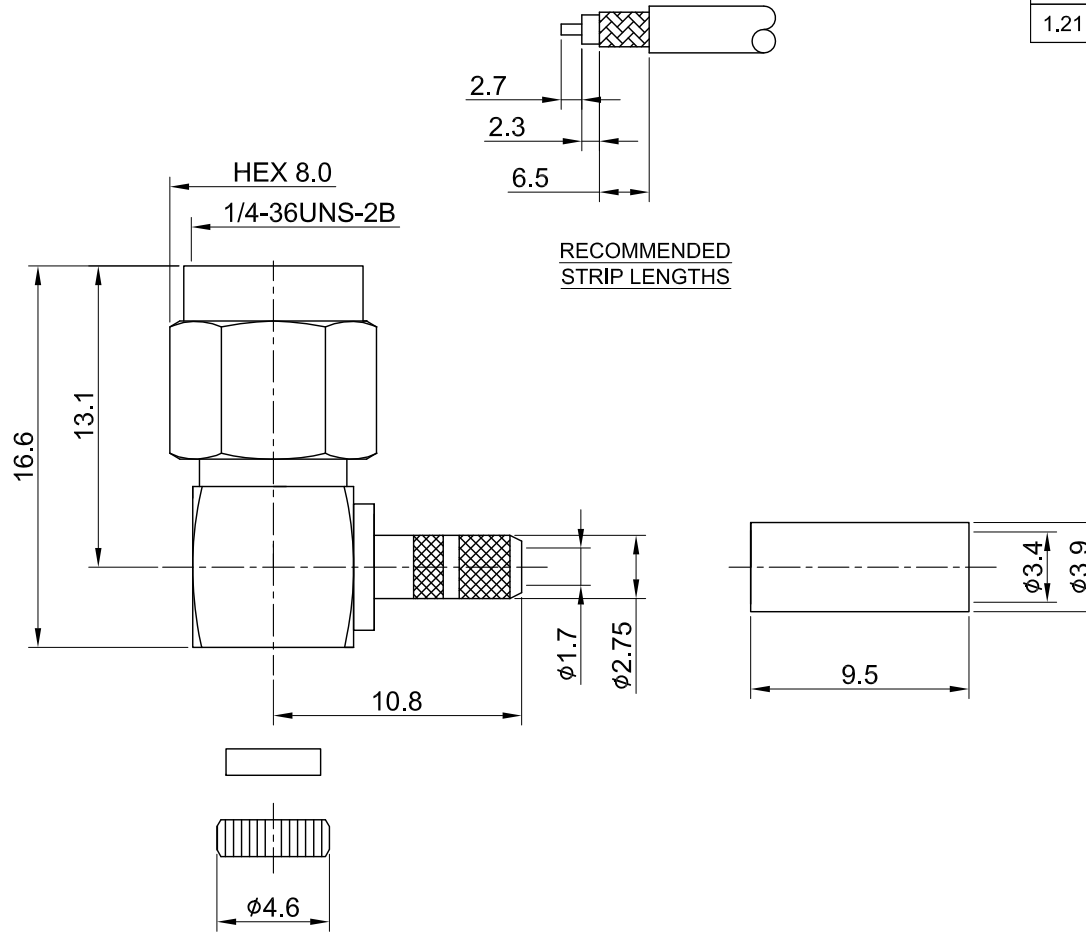

09	INSULATOR B	TEFLON	NONE	1
08	CAP	BRASS	GOLD	1
07	FERRULE	BRASS	GOLD	1
06	GASKET	SILICONE RUBBER	NONE	1
05	INNER RETAINING RING	Be.Cu	NONE	1
04	SHELL	BRASS	GOLD	1
03	INSULATOR A	TEFLON	NONE	1
02	PIN	BRASS	GOLD	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		SMA(M) ra. crimp type for LMR100/CFD100	
DWG NO.		C01BA31L10008A	
CUST. P/N: N/A		DWG NO: N/A	
SHEET 1 of 1		Unit: mm	
GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A		DRAWN BY: Kelly 2023/12/21 CHK'D BY: Eileen 2023/12/21 REV. 1.21 DA2312180031	

MECHANICAL DATA
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHz
 IMPEDANCE : 50Ω
 VSWR : 1.5 MAX.
 WORKING VOLTAGE : AC 375V
 WITHSTANDING VOLTAGE : AC 750V
 INSULATION RESISTANCE : 5000 MΩ MIN

