


REV	DESCRIPTION	DATE
1.40	NEW DRAWING FRAME	2023/07/26
1.41	CORRECT INSULATION RESISTANCE UNIT	2023/12/21

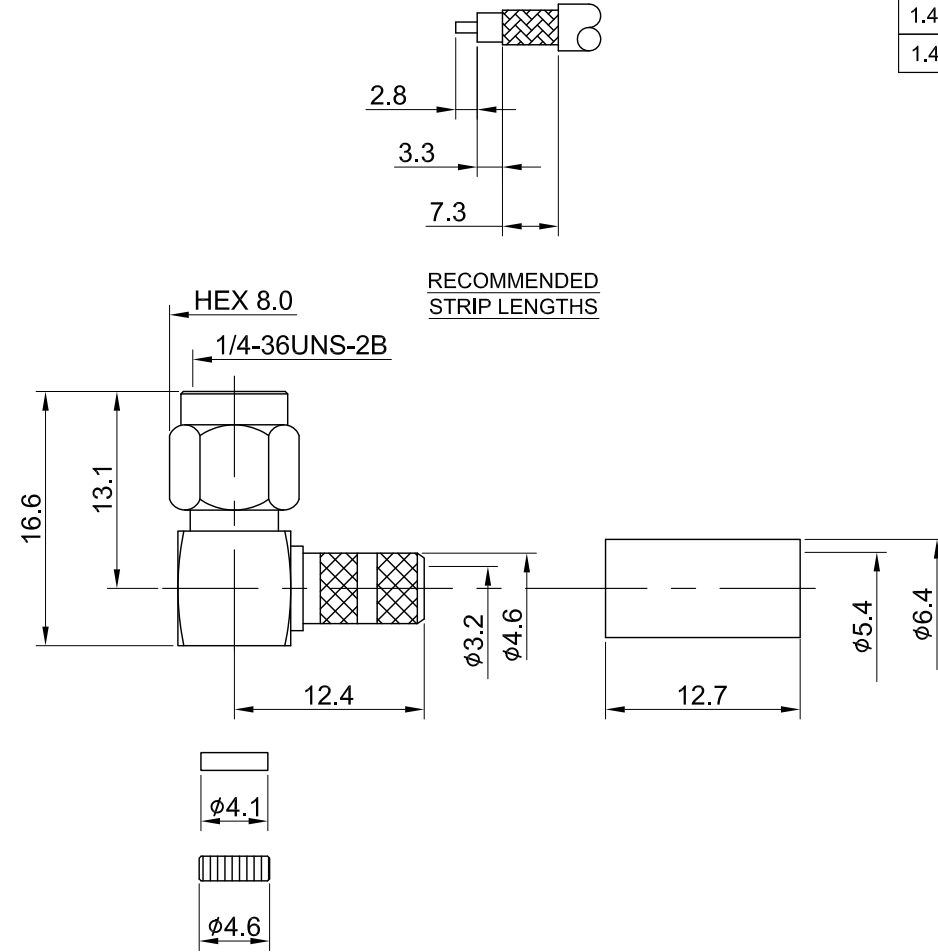

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1000V
INSULATION RESISTANCE : 5000 MΩ MIN

08	CAP	BRASS	GOLD	1	TITLE	C01BA31L20008A		GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	DRAWN BY: Kelly	2023/12/21
07	FERRULE	BRASS	GOLD	1					CHK'D BY: Eileen	2023/12/21
06	GASKET	SILICONE RUBBER	NONE	1	DWG NO.			REV.	DA2312180033	1.41
05	INNER RETAINING RING	Be.Cu	NONE	1	CUST. P/N: N/A	DWG NO: N/A				
04	SHELL	BRASS	GOLD	1	SHEET	1 of 1	Unit: mm			
03	INSULATOR	TEFLON	NONE	2						
02	PIN	BRASS	GOLD	1						
01	BODY	BRASS	GOLD	1						
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY						