


REV	DESCRIPTION	DATE
3.20	NEW DRAWING FRAME	2023/07/25
3.21	CORRECT INSULATION RESISTANCE UNIT	2023/12/21

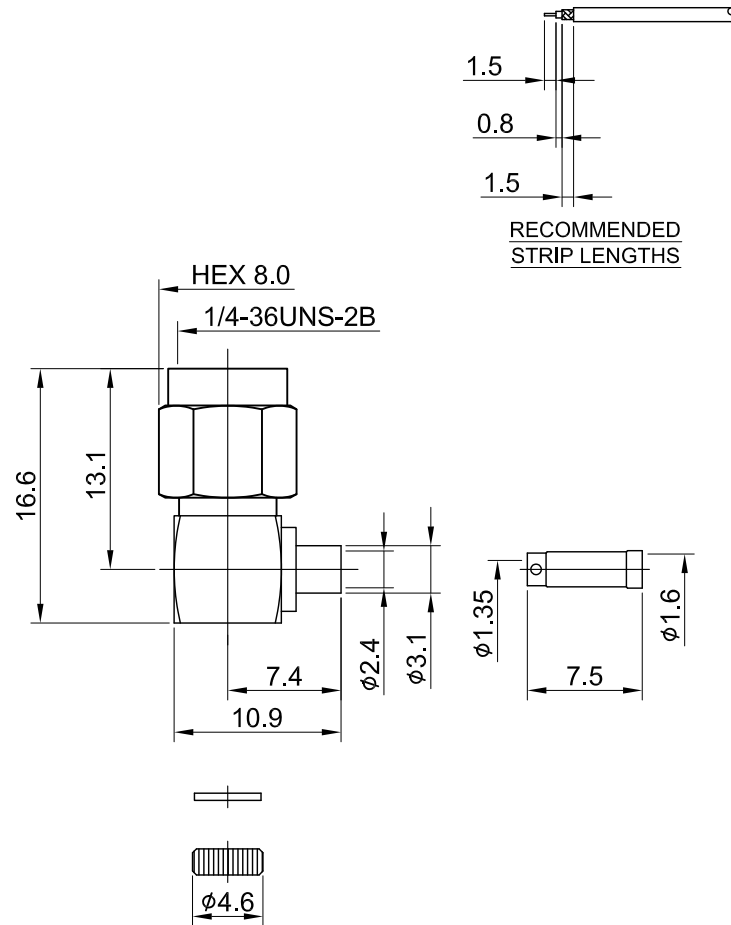

MECHANICAL DATA  
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
FREQUENCY RANGE: DC~6GHZ  
IMPEDANCE : 50Ω  
VSWR : 1.5 MAX.  
WORKING VOLTAGE : AC 170V  
WITHSTANDING VOLTAGE : AC 500V  
INSULATION RESISTANCE : 5000 MΩ MIN

09	INSULATOR B	TEFLON	NONE	1
08	CAP	BRASS	GOLD	1
07	SLEEVE	BRASS	NICKEL	1
06	GASKET	SILICONE RUBBER	NONE	1
05	RING	Be Cu	NONE	1
04	SHELL	BRASS	GOLD	1
03	INSULATOR A	TEFLON	NONE	1
02	PIN	BRASS	GOLD	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		SMA R/A Plug Crimp for 1.48 Cable	
DWG NO.		C01BA31148008	
CUST.		N/A	
P/N:		N/A	
DWG NO:		N/A	
SHEET 1 of 1		Unit: mm	
GENERAL TOLERANCES		DRAWN BY: Kelly 2023/12/21	
.X ±0.2		CHK'D BY: Eileen 2023/12/21	
.XX ±0.2		REV.	
.XXX ±0.2		3.21	
ANGLES N/A		DA2312180024	

