


REV	DESCRIPTION	DATE
3.10	NEW DRAWING FRAME	2023/07/25
3.11	CORRECT INSULATION RESISTANCE UNIT	2023/12/21

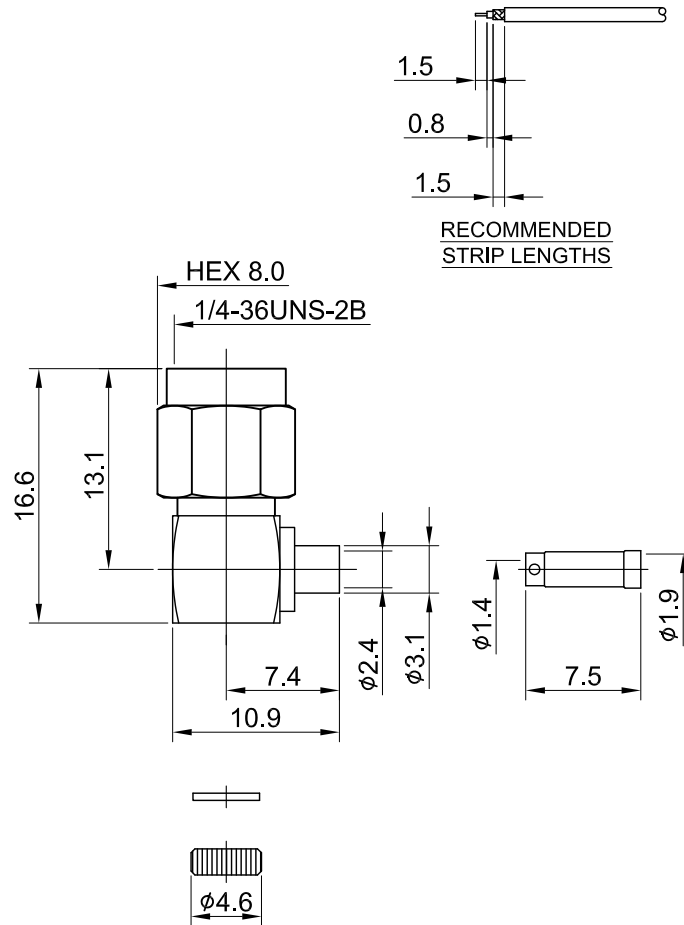

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 170V
WITHSTANDING VOLTAGE : AC 500V
INSULATION RESISTANCE : 5000 MΩ MIN

09	INSULATOR B	TEFLON	NONE	1
08	CAP	BRASS	GOLD	1
07	SLEEVE	BRASS	NICKEL	1
06	GASKET	SILICONE RUBBER	NONE	1
05	RING	Be Cu	NONE	1
04	SHELL	BRASS	GOLD	1
03	INSULATOR A	TEFLON	NONE	1
02	PIN	BRASS	GOLD	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2023/12/21
SMA R/A Plug Crimp for RG178 Cable		CHK'D BY: Eileen		2023/12/21
DWG NO. C01BA31178008		REVISION		3.11
CUST. P/N: N/A		DA2312180026		
DWG NO: N/A				
SHEET 1 of 1		Unit: mm		



GENERAL TOLERANCES		DRAWN BY: Kelly		2023/12/21
.XX ±0.2		CHK'D BY: Eileen		2023/12/21
.XXX ±0.2		REVISION		3.11
ANGLES N/A		DA2312180026		