


REV	DESCRIPTION	DATE
1.30	NEW DRAWING FRAME	2023/08/07
1.40	CORRECT INSULATION RESISTANCE	2023/11/08

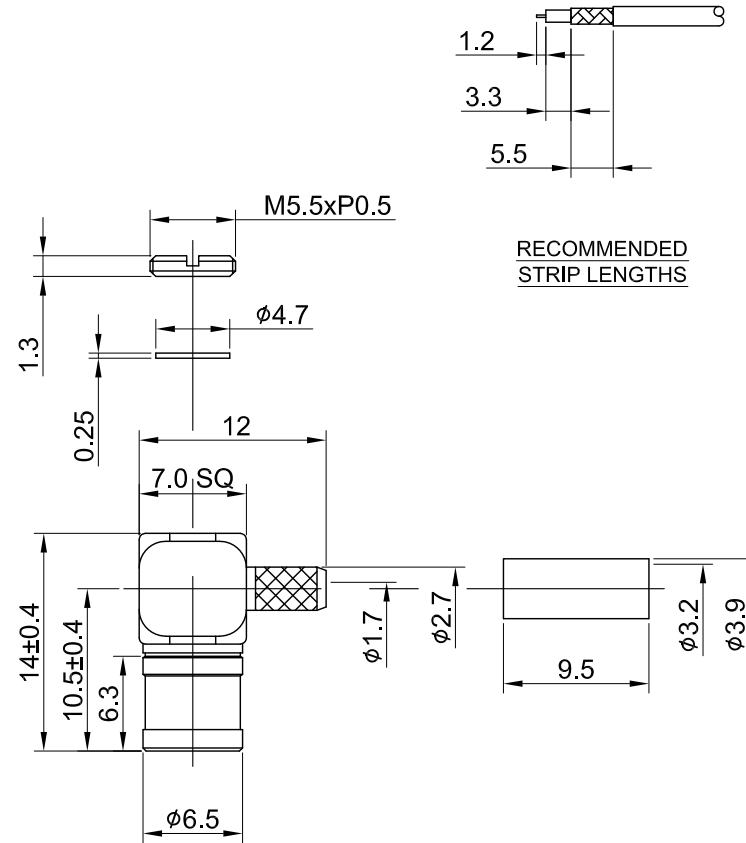

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -40°C ~ + 85°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~3GHZ
 IMPEDANCE : 75Ω
 VSWR : 1.5 MAX.
 WORKING VOLTAGE : AC 335V
 WITHSTANDING VOLTAGE : AC 750V
 INSULATION RESISTANCE : 1000 MΩ MIN

09	FERRULE	BRASS	GOLD	1
08	NUT	BRASS	GOLD	1
07	INSULATOR COVER	PET	NONE	1
06	BODY B	BRASS	GOLD	1
05	PIN	Be.Cu	GOLD	1
04	INSULATOR	TEFLON	NONE	1
03	BODY A	BRASS	GOLD	1
02	SHELL	BRASS	GOLD	1
01	C-RING	Be.Cu	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		SMB(M) ra. crimp type for RG179, 75ohm	
DWG NO.		C03PA3F179001	
CUST.		DRAWN BY: Lottie 2023/11/08	
P/N: N/A		CHK'D BY: Dora 2023/11/08	
DWG NO: N/A			
SHEET 1 of 1		GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	
Unit: mm		REV. 1.40 DA2311060014	