


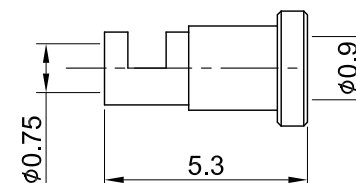



REV	DESCRIPTION	DATE
1.40	NEW DRAWING FRAME	2023/07/31
1.50	CORRECT INSULATION RESISTANCE	2023/11/17



RECOMMENDED
STRIP LENGTHS

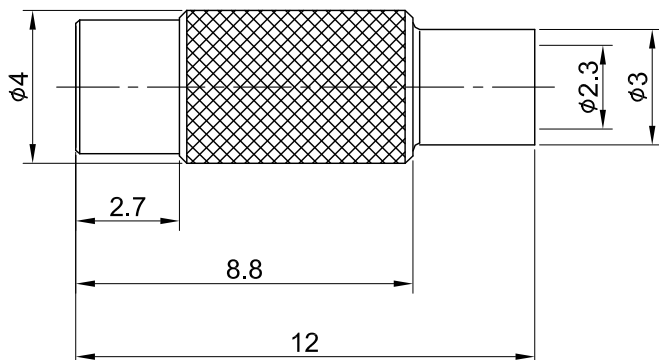

MECHANICAL DATA
DURABILITY : 500 CYCLES
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.3 MAX.
WORKING VOLTAGE : AC 170V
WITHSTANDING VOLTAGE : AC 500V
INSULATION RESISTANCE : 1000 MΩ MIN

05	FERRULE	BRASS	GOLD	1
04	INSULATOR B	TEFLON	NONE	1
03	CENTER PIN	Be.Cu	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE

MMCX (F) st. crimp for 0.81 cable

DWG NO.
C06AA3F081006C

CUST.
P/N: N/A
DWG NO: N/A


SHEET 1 of 1 Unit: mm



GENERAL
TOLERANCES

.X ±0.2
.XX ±0.2
.XXX ±0.2
ANGLES N/A

DRAWN BY: Lottie 2023/11/17
CHK'D BY: Kana 2023/11/17



REV.
1.50

DA2311160009