



REV	DESCRIPTION	DATE
2.10	NEW DRAWING FRAME	2023/08/18
2.20	CORRECT INSULATION RESISTANCE	2023/11/17



RECOMMENDED STRIP LENGTHS

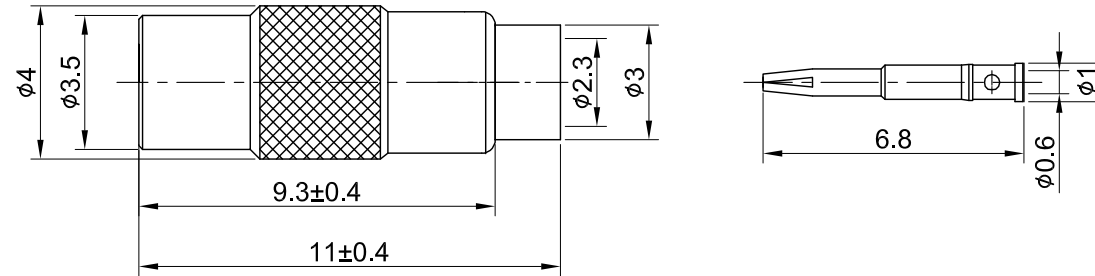

MECHANICAL DATA  
 DURABILITY : 500 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~6GHZ  
 IMPEDANCE : 50Ω  
 VSWR : 1.3 MAX.  
 WORKING VOLTAGE : AC 170V  
 WITHSTANDING VOLTAGE : AC 500V  
 INSULATION RESISTANCE : 1000 MΩ MIN

04	BODY B	BRASS	GOLD	1
03	CENTER PIN	Be.Cu	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY A	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:	
MMCX(F)st. solder for .085" cable		Lottie	2023/11/17
DWG NO.		CHK'D BY:	
C06AA3F085018		Kana	2023/11/17
CUST.		GENERAL TOLERANCES	
P/N: N/A		.X	±0.2
DWG NO: N/A		.XX	±0.2
SHEET 1 of 1		.XXX	±0.2
Unit: mm		ANGLES	N/A
		DA2311160010	
		REV. 2.20	

