


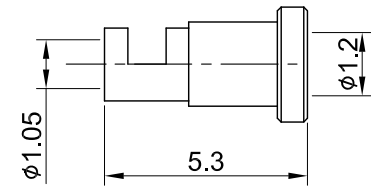



REV	DESCRIPTION	DATE
1.40	NEW DRAWING FRAME	2023/07/31
1.50	CORRECT INSULATION RESISTANCE	2023/11/17



RECOMMENDED STRIP LENGTHS

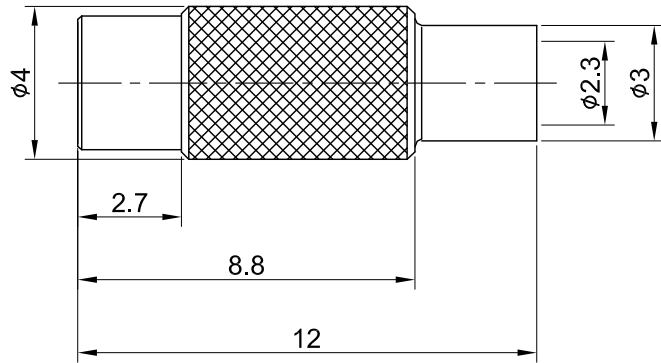

MECHANICAL DATA  
 DURABILITY : 500 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~6GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.3 MAX.  
 WORKING VOLTAGE : AC 170V  
 WITHSTANDING VOLTAGE : AC 500V  
 INSULATION RESISTANCE : 1000 MΩ MIN

05	FERRULE	BRASS	GOLD	1
04	INSULATOR B	TEFLON	NONE	1
03	CENTER PIN	Be.Cu	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:		CHK'D BY:		REVISION	
MMCX(F) st. crimp type for 1.13/1.13LL cable		Lottie	2023/11/17	Kana	2023/11/17	REV.	
DWG NO. C06AA3F113006C		DRAWN BY: Lottie 2023/11/17		CHK'D BY: Kana 2023/11/17		DA2311160011	1.50
CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES		ANGLES			
SHEET 1 of 1 Unit: mm		.X ±0.2 .XX ±0.2 .XXX ±0.2		N/A			

