
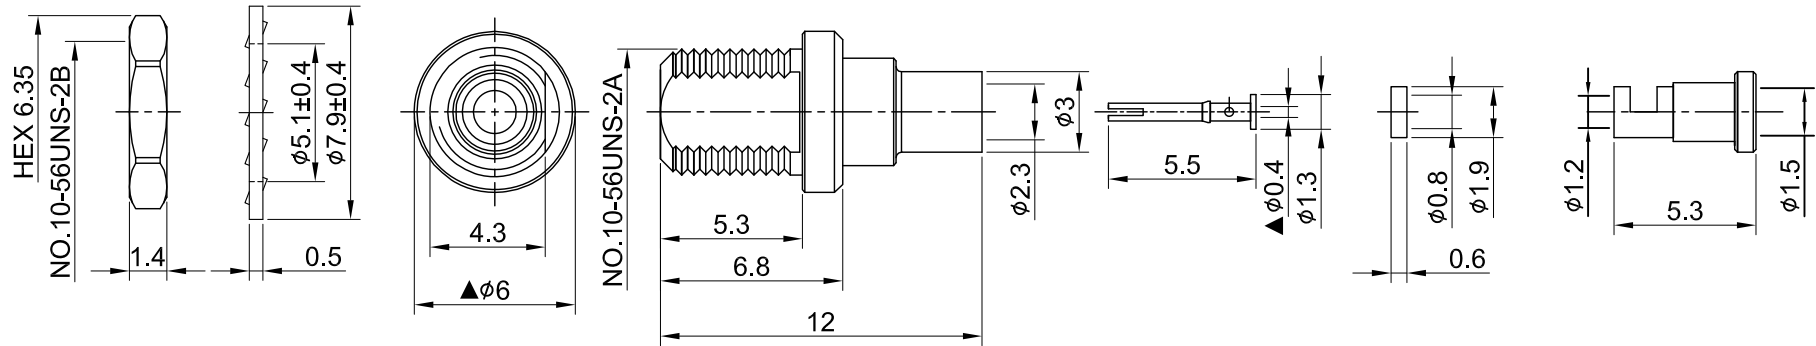


REV	DESCRIPTION	DATE
1.10	ADD DIMENSION $\phi 6$, CHG $\phi 0.4$ W. $\phi 0.5$	2023/07/11
1.20	CORRECT INSULATION RESISTANCE	2023/11/21

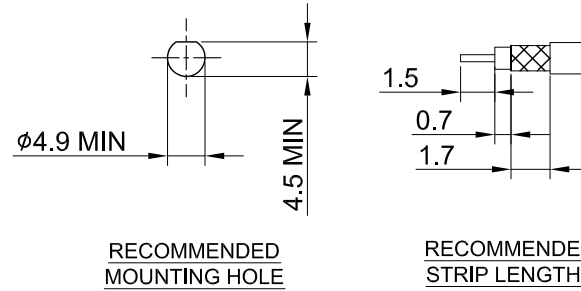

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHz
 IMPEDANCE : 50 Ω
 VSWR : 1.3 MAX.
 WORKING VOLTAGE : AC 170V
 WITHSTANDING VOLTAGE : AC 500V
 INSULATION RESISTANCE : 1000 M Ω MIN

07	NUT	BRASS	GOLD	1
06	WASHER	BRASS	GOLD	1
05	FERRULE	BRASS	GOLD	1
04	GASKET	TEFLON	NONE	1
03	CENTER PIN	Be.Cu	GOLD	1
02	BODY	BRASS	GOLD	1
01	INSULATOR	TEFLON	NONE	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:							
MMCX(F) bh. for 1.32/1.32DS		Lottie	2023/11/21						
DWG NO. C06AB3F132007A		CHK'D BY:	Kana 2023/11/21						
CUST. P/N: N/A DWG NO: N/A		<table border="1"> <tr> <td>GENERAL TOLERANCES</td> <td>ANGLES</td> </tr> <tr> <td>.X ± 0.2</td> <td>.XX ± 0.2</td> </tr> <tr> <td>.XXX ± 0.2</td> <td>N/A</td> </tr> </table>		GENERAL TOLERANCES	ANGLES	.X ± 0.2	.XX ± 0.2	.XXX ± 0.2	N/A
GENERAL TOLERANCES	ANGLES								
.X ± 0.2	.XX ± 0.2								
.XXX ± 0.2	N/A								
SHEET 1 of 1	Unit: mm	DA2311160028	REV. 1.20						

