


REV	DESCRIPTION	DATE
1.20	CHG 1.2/ 0.3 W. 0.7/0.8	2023/08/02
1.30	CORRECT INSULATION RESISTANCE	2023/11/14

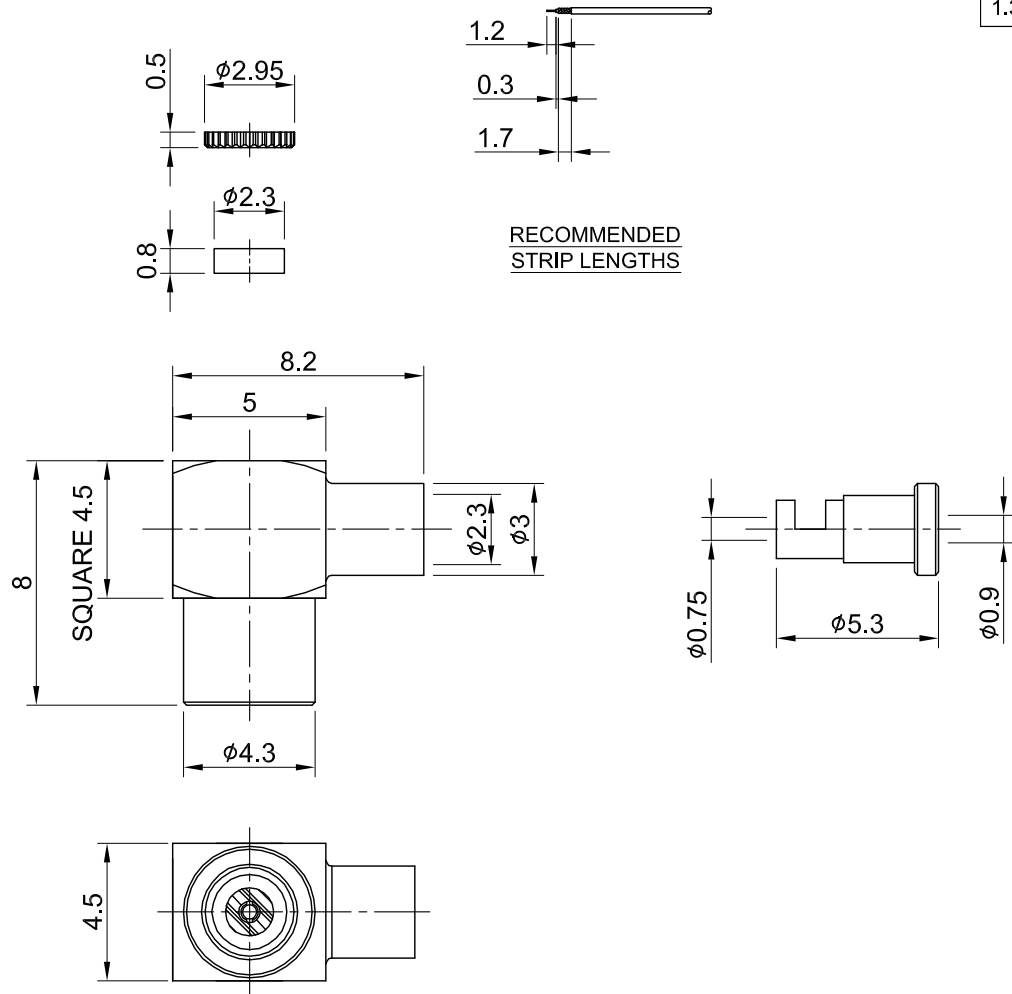

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -40°C ~ + 85°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHz
 IMPEDANCE : 50Ω
 VSWR : DC~3.0GHz : 1.3 MAX.
 3.01~6.0GHz : 1.5 MAX
 WORKING VOLTAGE : AC 170V
 WITHSTANDING VOLTAGE : AC 500V
 INSULATION RESISTANCE : 1000 MΩ MIN

TITLE	
MMCX(F) ra. for 0.81mm cable	

06	FERRULE	BRASS	GOLD	1
05	INSULATOR	TEFLON	NONE	1
04	CENTER PIN	Be.Cu	GOLD	1
03	BODY	BRASS	GOLD	1
02	INSULATOR COVER	POM	NONE	1
01	COVER	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

DWG NO. C06BA3F081005B		GENERAL TOLERANCES	DRAWN BY: Lottie 2023/11/14
CUST. P/N: N/A DWG NO: N/A		.X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	CHK'D BY: Dora 2023/11/14
SHEET 1 of 1	Unit: mm		REV. 1.30
		DA2311090006	