


REV	DESCRIPTION	DATE
1.10	CHG INSULATOR COVER PET W. POM	2023/08/17
1.20	CORRECT INSULATION RESISTANCE	2023/11/14

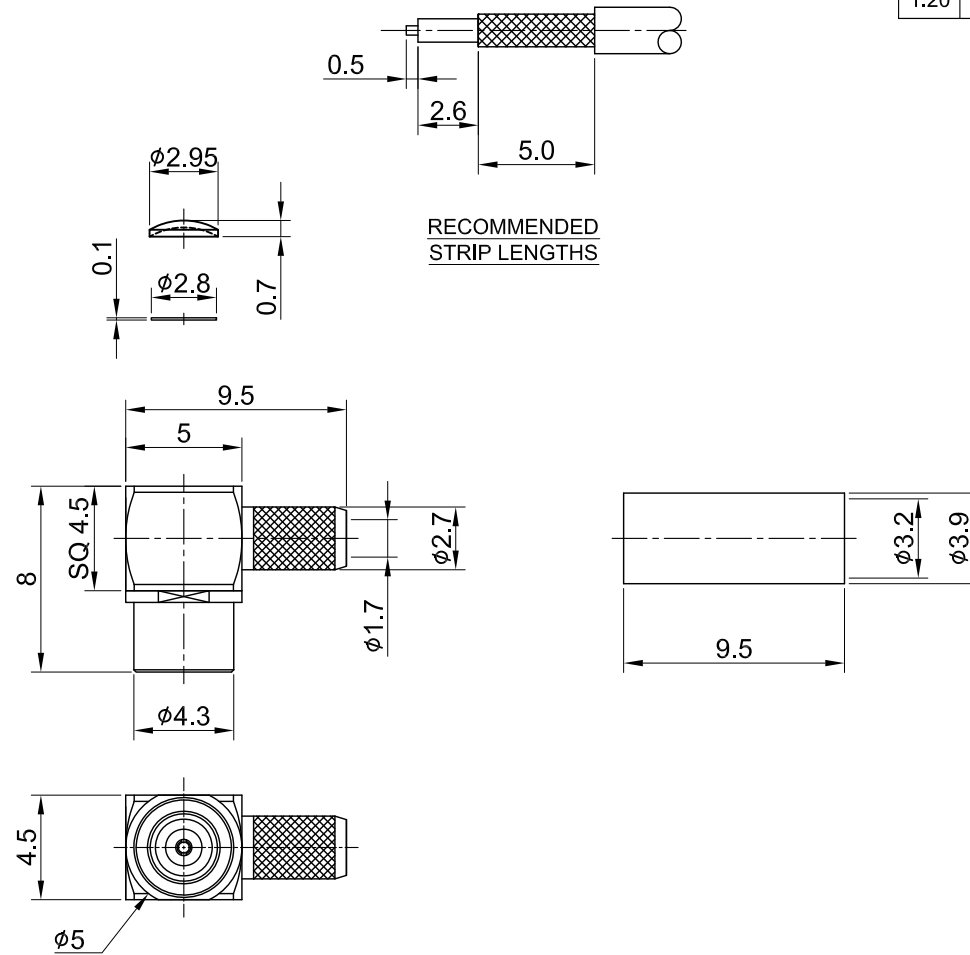

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -40°C ~ + 85°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHz
 IMPEDANCE : 50Ω
 VSWR : 1.5 MAX.
 WORKING VOLTAGE : AC 170V
 WITHSTANDING VOLTAGE : AC 500V
 INSULATION RESISTANCE : 1000 MΩ MIN

07	FERRULE	BRASS	GOLD	1
06	BODY B	BRASS	GOLD	1
05	INSULATOR	TEFLON	NONE	1
04	CENTER PIN	Be.Cu	GOLD	1
03	BODY A	BRASS	GOLD	1
02	INSULATOR COVER	PET	NONE	1
01	COVER	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:		DATE
MMCX R/A jack crimp for RG174/RG316		Lottie	2023/11/14	
DWG NO. C06BA3F174005		CHK'D BY:	Dora	2023/11/14
CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES		REV.
SHEET 1 of 1 Unit: mm		.X ±0.2	ANGLES N/A	1.20
		DA2311090010		

