



REV	DESCRIPTION	DATE
2.40	NEW DRAWING FRAME	2023/08/30
2.41	CORRECT INSULATOR RESISTANCE UNIT	2023/11/08



RECOMMENDED STRIP LENGTHS

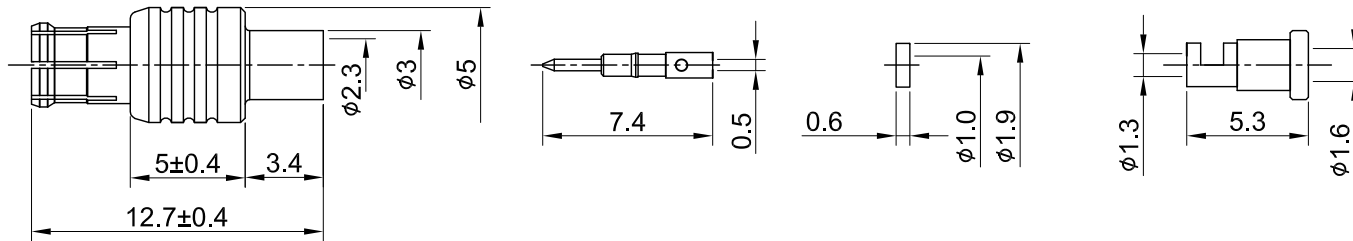

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.3 MAX.
WORKING VOLTAGE : AC 335V
WITHSTANDING VOLTAGE : AC 500V
INSULATION RESISTANCE : 1000 MΩ MIN

06	FERRULE	BRASS	GOLD	1
05	GASKET	TEFLON	NONE	1
04	BODY B	BRASS	GOLD	1
03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY A	Be.Cu	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:		CHK'D BY:		REVISION	
MCX(M) st. for 1.37 cable		Kelly		Eileen		2023/11/18	
DWG NO. C07AA31137004A		2023/11/18		2023/11/18		REV. 2.41	
CUST. P/N: N/A DWG NO: N/A		DA2311080015		Unit: mm		ANGLES N/A	

