


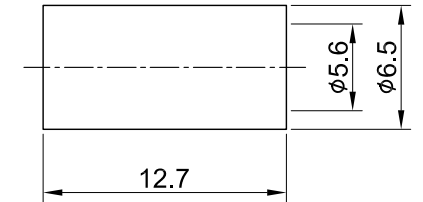
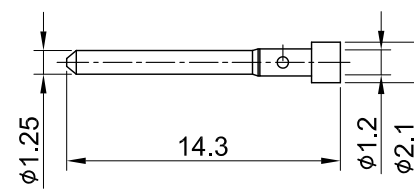


REV	DESCRIPTION	DATE
1.21	UPDATE RECOMMENDED CABLE STRIPPING DIM	2023/02/13
1.30	NEW DRAWING FRAME	2024/05/06

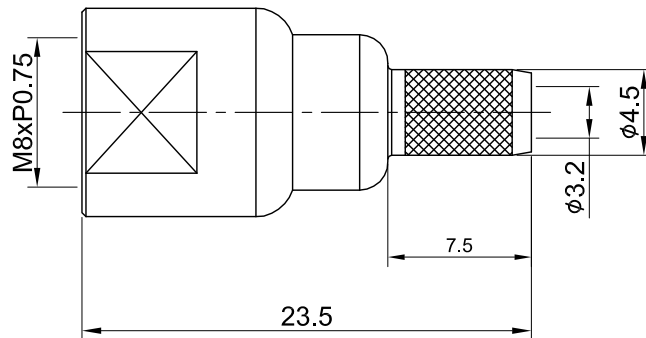

RECOMMENDED STRIP LENGTHS

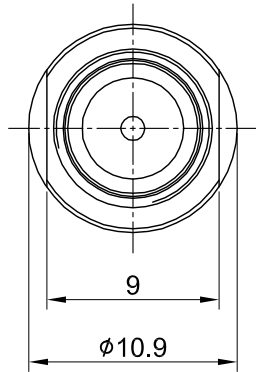

MECHANICAL DATA
 DURABILITY : 100 CYCLES
 TEMPERATURE RANGE : -40°C ~ + 85°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~1GHz
 IMPEDANCE : 50Ω
 VSWR : 1.5 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1000V
 INSULATION RESISTANCE : 5000 MΩ MIN

04	FERRULE	BRASS	NICKEL	1
03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR	POM	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/05/06	
FME(M)st crimp for LMR200(Ni)		CHK'D BY: Dora		2024/05/06	
DWG NO. C29CA3FL20002		REVISION		REV. 1.30	
CUST. P/N: N/A		GENERAL TOLERANCES		DA2405060004	
DWG NO: N/A		.X ±0.2		Unit: mm	
SHEET 1 of 1		.XX ±0.2			
		.XXX ±0.2			
		ANGLES N/A			

