


REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2012/07/07
1.10	UPDATE RECOMMENDED STRIP LENGTHS	2024/08/19

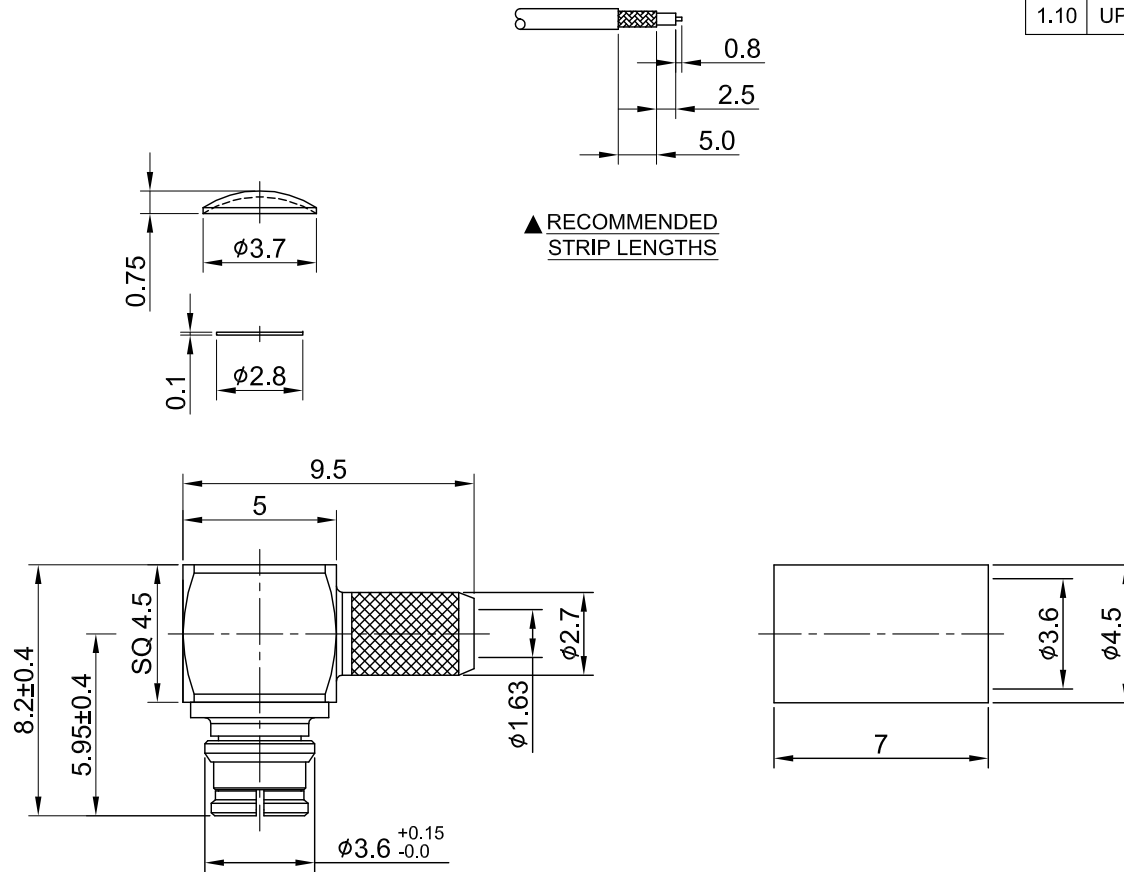

▲ RECOMMENDED STRIP LENGTHS

MECHANICAL DATA  
 DURABILITY : 500 CYCLES  
 TEMPERATURE RANGE : -40°C ~ + 85°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~6GHZ  
 IMPEDANCE : 50Ω  
 VSWR : 1.3 MAX.  
 WORKING VOLTAGE : AC 335V  
 WITHSTANDING VOLTAGE : AC 500V  
 INSULATION RESISTANCE : 5000 MΩ MIN

08	FERRULE	BRASS	GOLD	1	TITLE SMP(F)ra. crimp type for RD316															
07	ROCK RING	STAINLESS STEEL	GOLD	1																
06	BODY B	BRASS	GOLD	1	DWG NO. C60BA3F316D01															
05	INSULATOR	TEFLON	NONE	1																
04	BODY A	Be.Cu	GOLD	1	CUST. P/N: N/A DWG NO: N/A															
03	CENTER PIN	Be.Cu	GOLD	1																
02	INSULATOR COVER	POM	NONE	1	<table border="0"> <tr> <td>GENERAL TOLERANCES</td> <td>DRAWN BY: Kelly</td> <td>2024/08/19</td> </tr> <tr> <td>.X ±0.2</td> <td>CHK'D BY: Eileen</td> <td>2024/08/19</td> </tr> <tr> <td>.XX ±0.2</td> <td colspan="2" rowspan="2"> </td> </tr> <tr> <td>.XXX ±0.2</td> </tr> <tr> <td>ANGLES N/A</td> <td>DA2408190012</td> <td>REV. 1.10</td> </tr> </table>			GENERAL TOLERANCES	DRAWN BY: Kelly	2024/08/19	.X ±0.2	CHK'D BY: Eileen	2024/08/19	.XX ±0.2			.XXX ±0.2	ANGLES N/A	DA2408190012	REV. 1.10
GENERAL TOLERANCES	DRAWN BY: Kelly	2024/08/19																		
.X ±0.2	CHK'D BY: Eileen	2024/08/19																		
.XX ±0.2																				
.XXX ±0.2																				
ANGLES N/A	DA2408190012	REV. 1.10																		
01	COVER	BRASS	GOLD	1																
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY	SHEET 1 of 1	Unit: mm														