


REV	DESCRIPTION	DATE
1.01	Add $\phi 3.6^{+0.15}_{-0}$	2022/11/24
1.10	UPDATE RECOMMENDED STRIP LENGTHS	2024/08/19

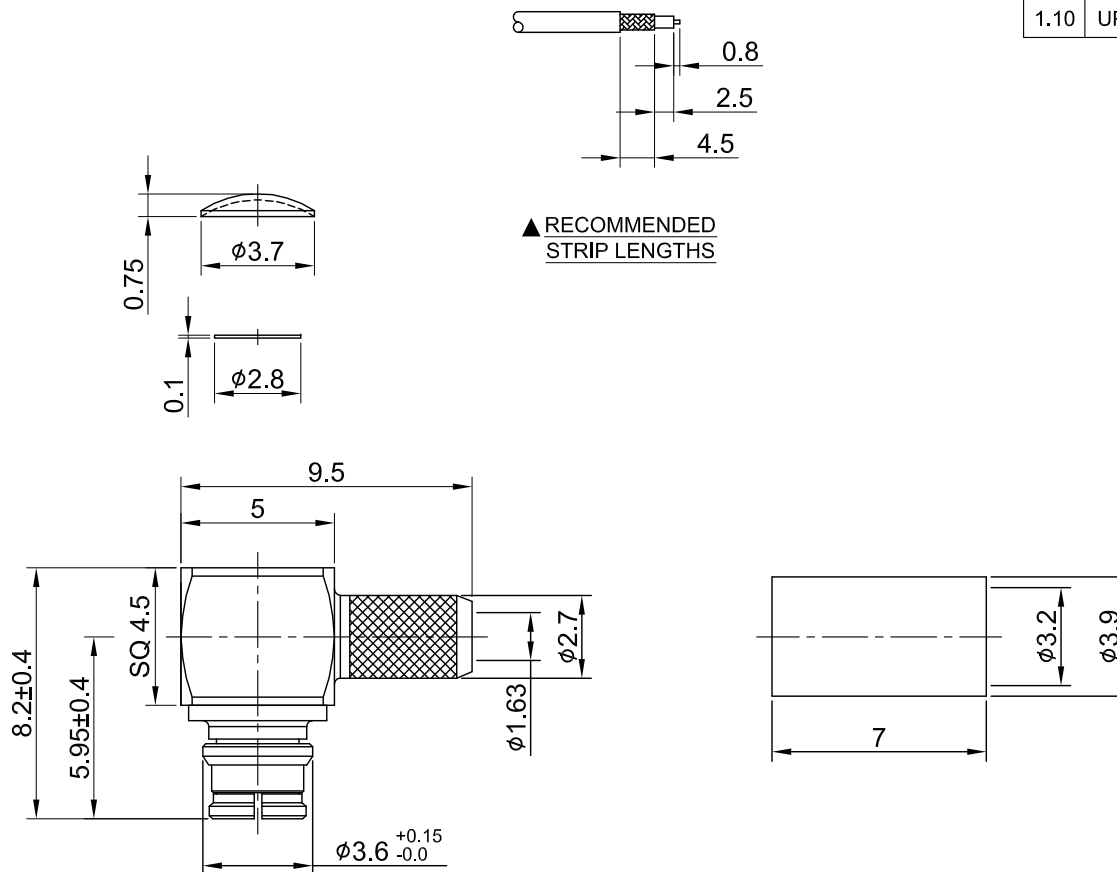

▲ RECOMMENDED STRIP LENGTHS

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -40°C ~ + 85°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHz
 IMPEDANCE : 50Ω
 VSWR : 1.3 MAX.
 WORKING VOLTAGE : AC 335V
 WITHSTANDING VOLTAGE : AC 500V
 INSULATION RESISTANCE : 5000 MΩ MIN

08	FERRULE	BRASS	GOLD	1	TITLE SMP(F) ra. crimp type for RG174/RG316																
07	ROCK RING	STAINLESS STEEL	GOLD	1																	
06	BODY B	BRASS	GOLD	1	DWG NO. C60BA3F174001																
05	INSULATOR	TEFLON	NONE	1																	
04	BODY A	Be.Cu	GOLD	1	CUST. P/N: N/A DWG NO: N/A																
03	CENTER PIN	Be.Cu	GOLD	1																	
02	INSULATOR COVER	POM	NONE	1	<table border="0"> <tr> <td>GENERAL TOLERANCES</td> <td>DRAWN BY: Kelly</td> <td>2024/08/19</td> </tr> <tr> <td>.X ±0.2</td> <td>CHK'D BY: Eileen</td> <td>2024/08/19</td> </tr> <tr> <td>.XX ±0.2</td> <td></td> <td></td> </tr> <tr> <td>.XXX ±0.2</td> <td></td> <td></td> </tr> <tr> <td>ANGLES N/A</td> <td></td> <td></td> </tr> </table>		GENERAL TOLERANCES	DRAWN BY: Kelly	2024/08/19	.X ±0.2	CHK'D BY: Eileen	2024/08/19	.XX ±0.2			.XXX ±0.2			ANGLES N/A		
GENERAL TOLERANCES	DRAWN BY: Kelly	2024/08/19																			
.X ±0.2	CHK'D BY: Eileen	2024/08/19																			
.XX ±0.2																					
.XXX ±0.2																					
ANGLES N/A																					
01	COVER	BRASS	GOLD	1	<table border="0"> <tr> <td>⊕</td> <td>REV.</td> </tr> <tr> <td>DA2408190011</td> <td>1.10</td> </tr> </table>		⊕	REV.	DA2408190011	1.10											
⊕	REV.																				
DA2408190011	1.10																				
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY	SHEET 1 of 1	Unit: mm															