





REV	DESCRIPTION	DATE
3.20	NEW DRAWING FRAME	2023/07/13
3.21	CORRECT INSULATION RESISTANCE UNIT	2024/04/03



RECOMMENDED STRIP LENGTHS

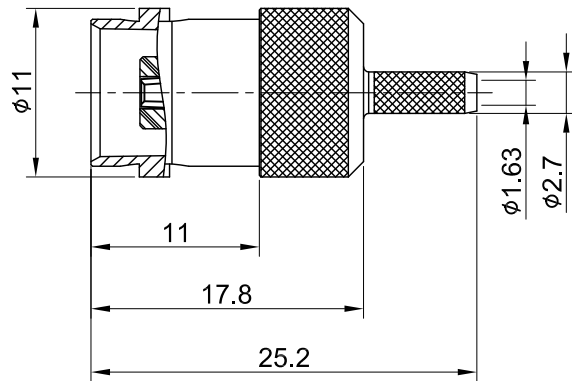

MECHANICAL DATA  
 DURABILITY : 100 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~4GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.35 MAX.  
 WORKING VOLTAGE : AC 500V  
 WITHSTANDING VOLTAGE : AC 1500V  
 INSULATION RESISTANCE : 5000 MΩ MIN

TITLE  
 BNC(F) st. crimp type for RG174, Nickel

05	FERRULE	BRASS	NICKEL	1
04	BULLET CONTACT	BRASS	GOLD	1
03	BODY	BRASS	NICKEL	1
02	PIN	P.BRONZE	GOLD	1
01	INSULATOR	TEFLON	NONE	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

DWG NO.	C16CA3F174003
CUST. P/N:	N/A
DWG NO:	N/A
SHEET	1 of 1
Unit:	mm

Wellshow

GENERAL TOLERANCES	DRAWN BY: Kelly	2024/04/03
.X ±0.2	CHK'D BY: Chili	2024/04/03
.XX ±0.2		
.XXX ±0.2		
ANGLES N/A		
		REV.
DA2403200012		3.21