


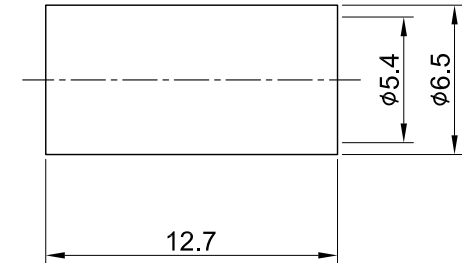


REV	DESCRIPTION	DATE
2.00	UPDATE DARWING, GASKET MATERIAL SILICONE RUBBER W. RUBBER	2021/08/06
2.10	NEW DRAWING FRAME	2024/01/04

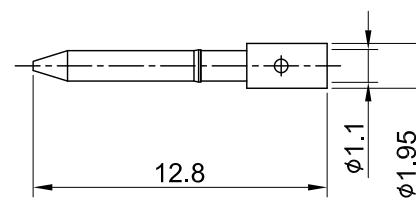

RECOMMENDED STRIP LENGTHS

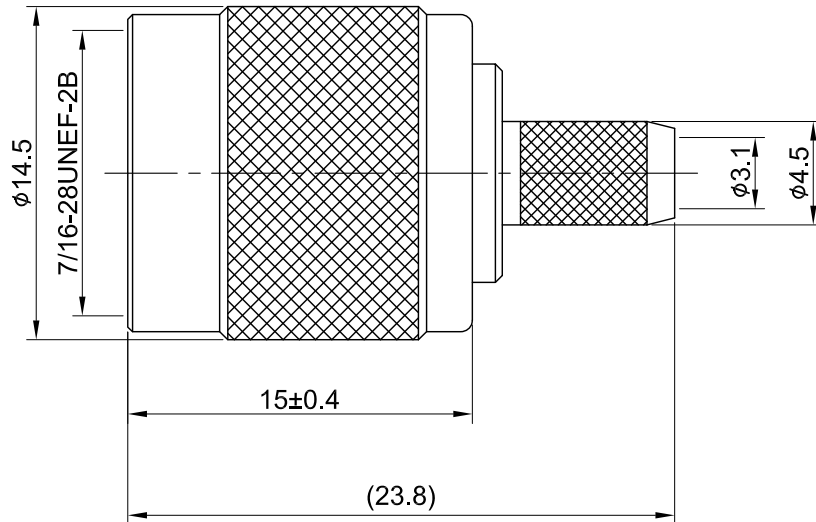

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHZ
IMPEDANCE : 50Ω
VSWR : 1.3 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1500V
INSULATION RESISTANCE : 5000 MΩ MIN

08	FERRULE	BRASS	NICKEL	1	TITLE TNC(M) st. crimp for RG58					
07	CENTER PIN	BRASS	GOLD	1						
06	BODY	BRASS	NICKEL	1						
05	INSULATOR	TEFLON	NONE	1	DWG NO. C17CA3F058A02		DRAWN BY: Kelly 2024/01/04			
04	WASHER	BRASS	NICKEL	1	CUST. P/N: N/A DWG NO: N/A		CHK'D BY: Chili 2024/01/04			
03	INNER RETAINING RING	BRASS	NICKEL	1					REV. 2.10	
02	GASKET	SILICONE RUBBER	RED	1					DA2401040004	
01	SHELL	BRASS	NICKEL	1	SHEET 1 of 1 Unit: mm					
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY						