


REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2022/02/21
1.10	ADD DIM $\phi 3.1 / \phi 4.5 / \phi 8$	2024/02/16

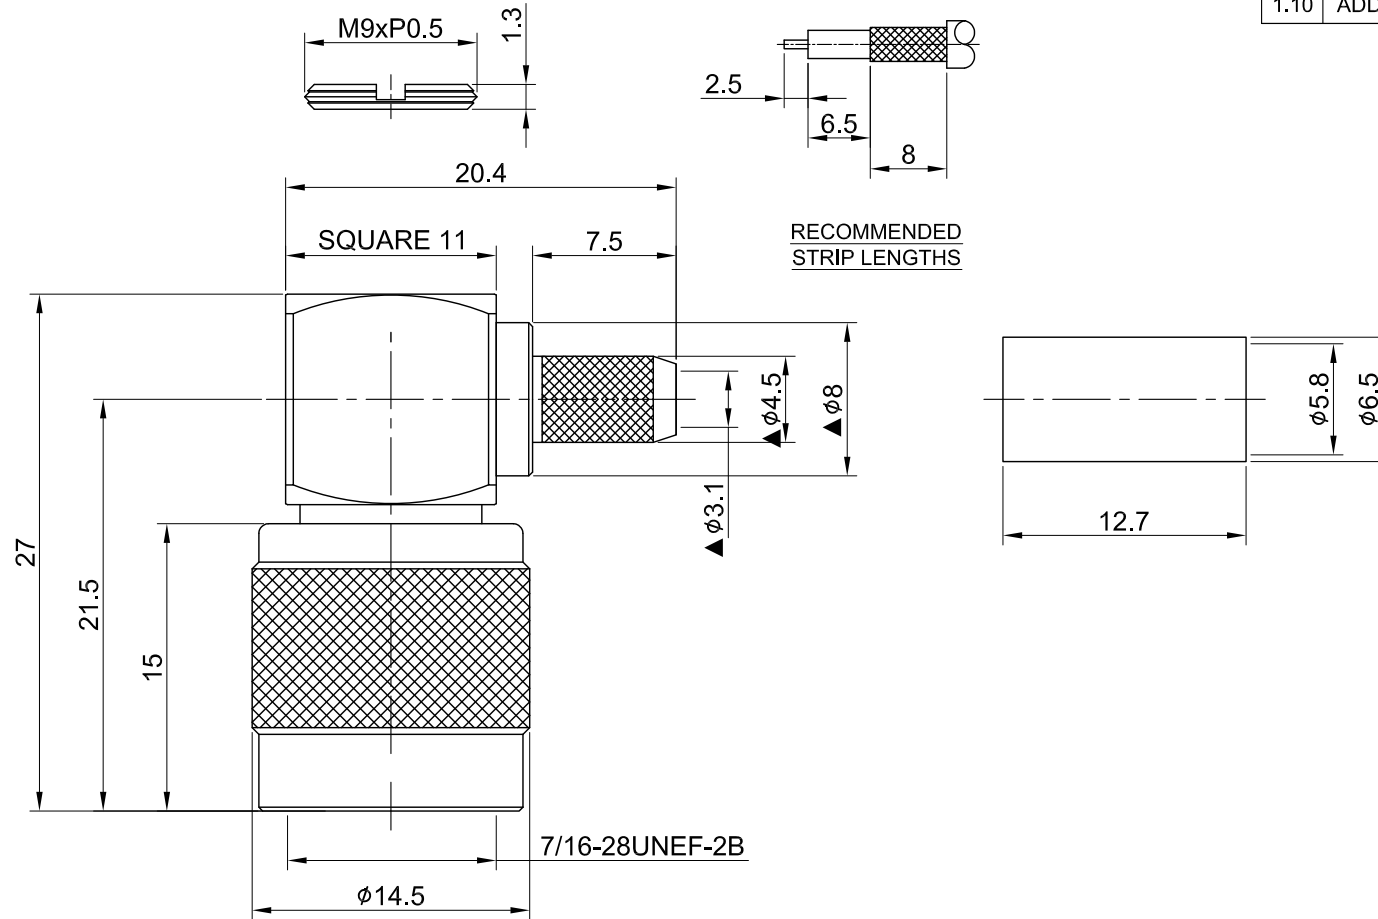

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~3GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1500V
INSULATION RESISTANCE : 5000 MΩ MIN

10	FERRULE	BRASS	NICKEL	1
09	CENTER PIN	BRASS	GOLD	1
08	INSULATOR	TEFLON	NONE	1
07	SHELL	BRASS	NICKEL	1
06	GASKET	SILICONE RUBBER	RED	1
05	INNER RETAINING RING	BRASS	NICKEL	1
04	WASHER	BRASS	NICKEL	1
03	BODY B	BRASS	NICKEL	1
02	BODY A	BRASS	NICKEL	1
01	NUT	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/02/16
TNC(M) ra. crimp for RG142		CHK'D BY: David		2024/02/16
DWG NO. C17DA3F142D04		GENERAL TOLERANCES		.X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A
CUST. P/N: N/A DWG NO: N/A		DA2402160002		
SHEET 1 of 1		Unit: mm		REV. 1.10

