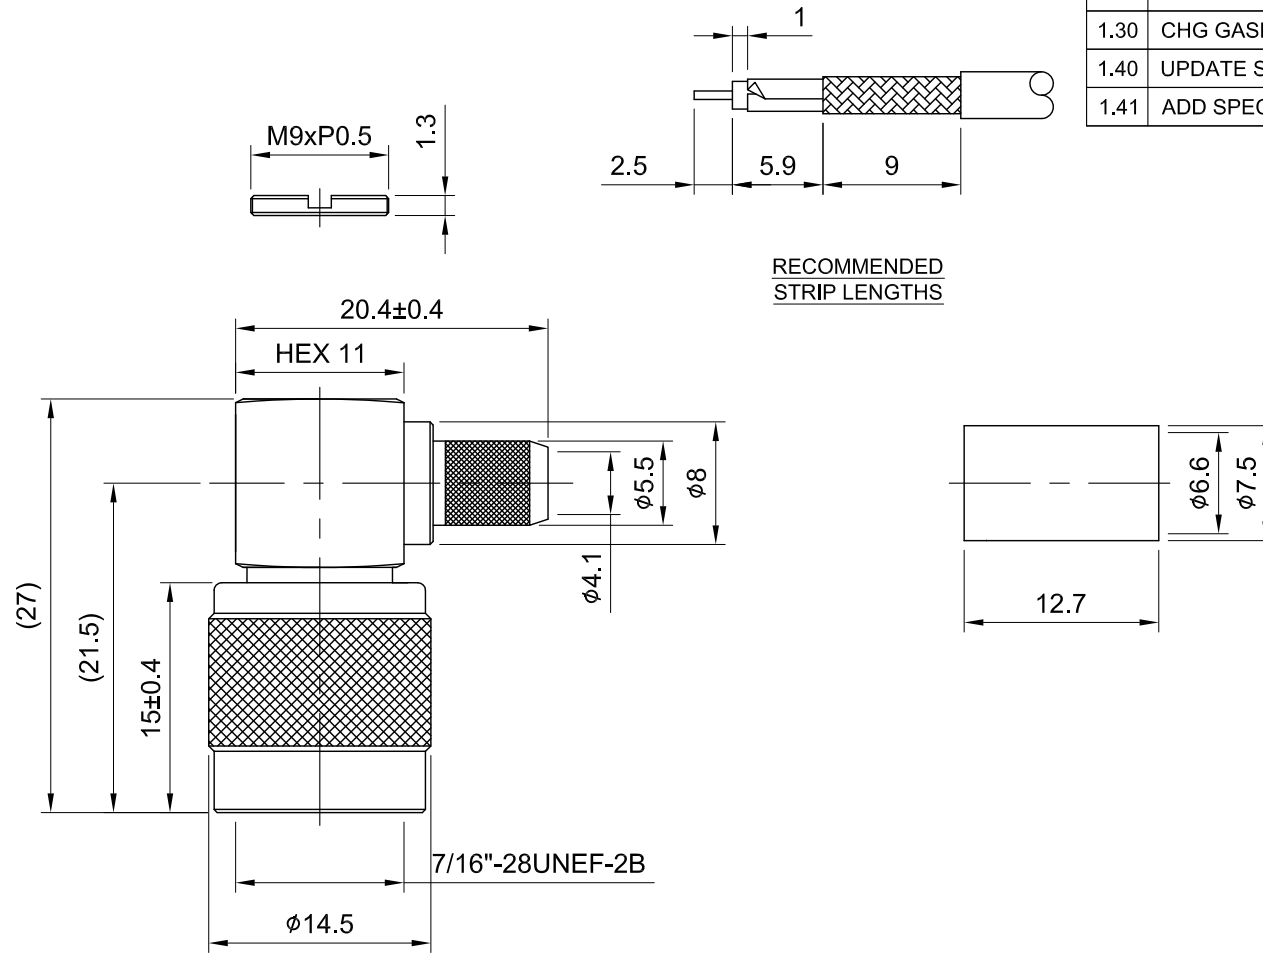




REV	DESCRIPTION	DATE
1.30	CHG GASKET SILICONE w. RUBBER	2020/09/24
1.40	UPDATE STRIP LENGHRS	2023/04/19
1.41	ADD SPECIFICATION	2024/01/15



10	FERRULE	BRASS	NICKEL	1
09	COVER	BRASS	NICKEL	1
08	BODY	BRASS	NICKEL	1
07	CABLE BODY	BRASS	NICKEL	1
06	CENTER PIN	BRASS	GOLD	1
05	INSIULATOR	TEFLON	NONE	1
04	WASHER	BRASS	NICKEL	1
03	INNER RETAINING RING	BRASS	NICKEL	1
02	GASKET	SILICONE RUBBER	RED	1
01	SHELL	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		
TNC Right Angle Plug Crimp for LMR240 Cable		
DWG NO.		GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A
C17DA3FL24004		
CUST. P/N: N/A		DRAWN BY: <i>Kelly</i> 2024/01/15 CHK'D BY: <i>Uma</i> 2024/01/15
DWG NO: N/A		
SHEET 1 of 1	Unit: mm	
		REV. 1.41

MECHANICAL DATA
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~3GHZ
 IMPEDANCE : 50Ω
 VSWR : 1.5 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1500V
 INSULATION RESISTANCE : 5000 MΩ MIN