



REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2022/01/26
1.10	CORRECT 2.0/1.0 W. 1.0/2.0	2024/01/04





RECOMMENDED
STRIP LENGTHS

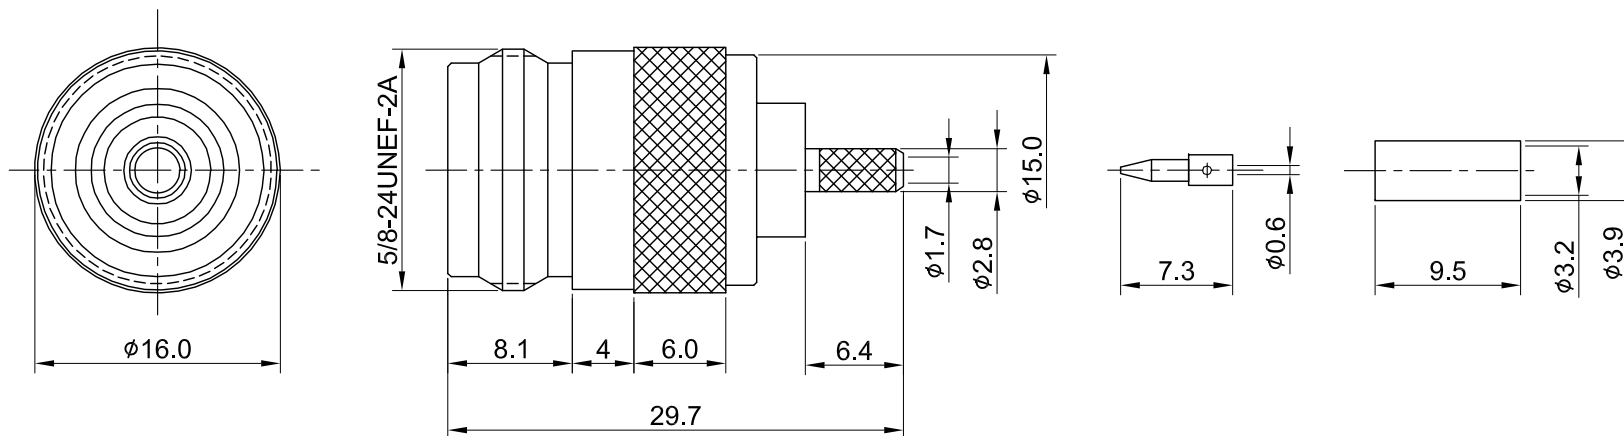

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.35 MAX.
WORKING VOLTAGE : AC 1000V
WITHSTANDING VOLTAGE : AC 2500V
INSULATION RESISTANCE : 5000 MΩ MIN

03	FERRULE	BRASS	NICKEL	1
02	BULLET CONTACT	BRASS	GOLD	1
01	CENTER PIN	P.BRONZE	GOLD	1
	INSULATOR	TEFLON	NONE	1
	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE			
N(F)st. crimp for RG174			
DWG NO. C28CA31174004A			
CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES	DRAWN BY: Kelly 2024/01/04
SHEET 1 of 1 Unit: mm		.X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	CHK'D BY: Maria 2024/01/04
			REV. 1.10
		DA2312270081	