
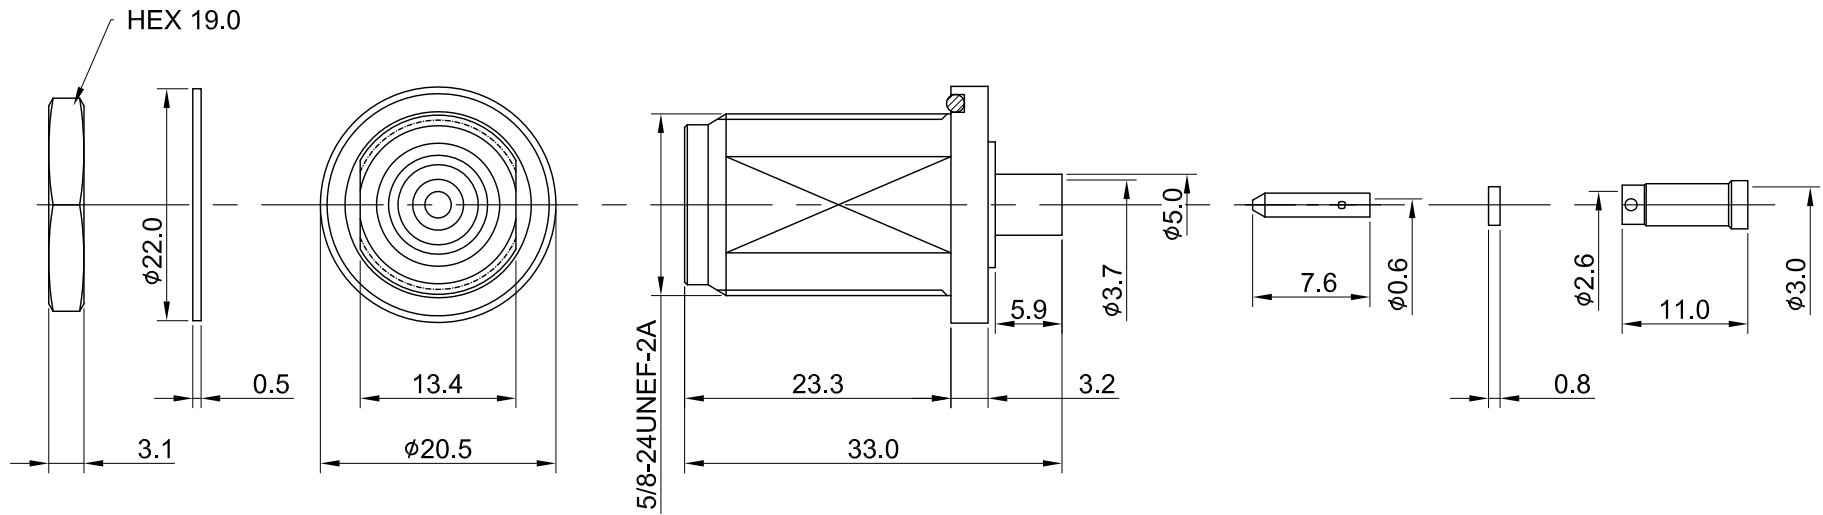


REV	DESCRIPTION	DATE
1.10	CHG INSULATOR B DIM 0.8 W. 0.5	2016/03/07
1.20	NEW DRAWING FRAME	2024/02/21
1.21	CHG FINISH Cu-Sn-Zn W. Cu-Zn-Sn	2024/04/24

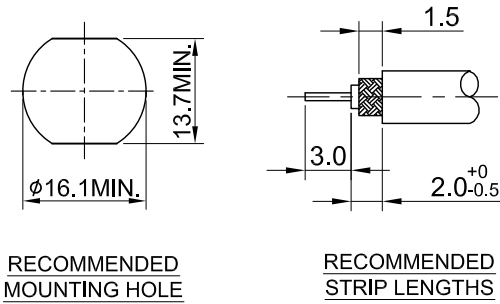

MECHANICAL DATA  
 DURABILITY : 100 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~6GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.35 MAX.  
 WORKING VOLTAGE : AC 1000V  
 WITHSTANDING VOLTAGE : AC 2500V  
 INSULATION RESISTANCE : 5000 MΩ MIN

09	GASKET	SILICONE RUBBER	BLACK	1
08	WASHER	BRASS	NICKEL	1
07	NUT	BRASS	NICKEL	1
06	SLEEVE	BRASS	NICKEL	1
05	INSULATOR B	TEFLON	NONE	1
04	CONTACT	BRASS	GOLD	1
03	INSULATOR A	TEFLON	NONE	1
02	PIN	P.BRONZE	GOLD	1
01	BODY	BRASS	Cu-Sn-Zn	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE  
 N(F) bh. wOring for RD316, Cuszn Plated body

DWG NO.  
 C28IE31316D02F

CUST.  
 P/N: N/A  
 DWG NO: N/A

SHEET 1 of 1 Unit: mm



GENERAL TOLERANCES		DRAWN BY: Kelly 2024/04/24	
.X	±0.2	CHK'D BY: Eileen	2024/04/24
.XX	±0.2		
.XXX	±0.2		
ANGLES	N/A		
		REV.	1.21
		DA2410240011	