


REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2024/01/02
1.10	NEW DRAWING FRAME	2019/03/12

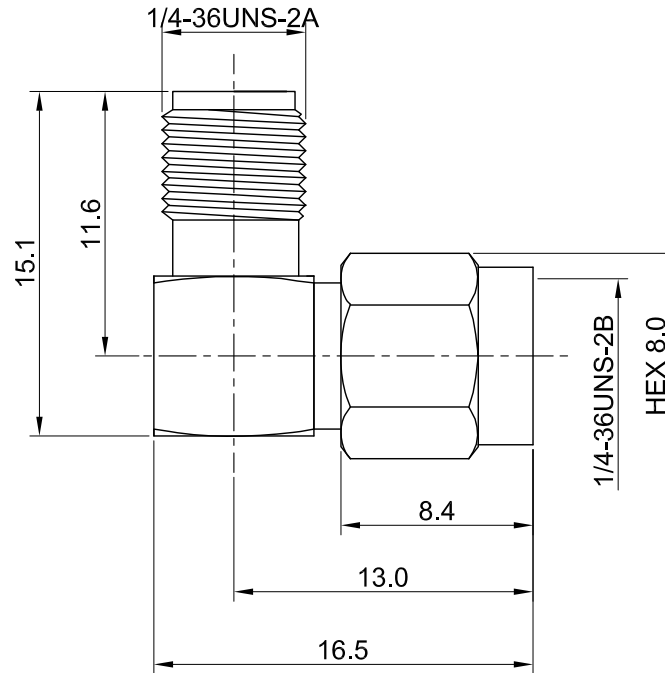

MECHANICAL DATA  
 DURABILITY : 100 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~6GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.8 MAX.  
 WORKING VOLTAGE : AC 500V  
 WITHSTANDING VOLTAGE : AC 1000V  
 INSULATION RESISTANCE : 5000 MΩ MIN

06	SHELL	BRASS	NICKEL	1
05	C-RING	Be.Cu	NONE	1
04	GASKE	SILICONE RUBBER	NONE	1
03	CENTER PIN	Be.Cu	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:		DATE	
SMA(M) R/A to SMA(F) Adaptor(Nickel)		Kelly		2024/01/02	
DWG NO. C0A00310102-08		CHK'D BY:		2024/01/02	
CUST. P/N: N/A DWG NO: N/A		Maria		REV. 1.10	
SHEET 1 of 1		Unit: mm		DA2312270021	



GENERAL TOLERANCES		ANGLES	
.X	±0.2		
.XX	±0.2		
.XXX	±0.2		
ANGLES	N/A		