


REV	DESCRIPTION	DATE
2.00	CHG GOLD plating, Update BOM, CHG DIM 14.3/φ1.93±0.05 w. 13.1/φ1.94 ⁺⁰ _{-0.05} ; ADD DIM 8.5/0.05±0.05	2017/12/27
2.10	NEW DRAWING FRAME	2024/01/05

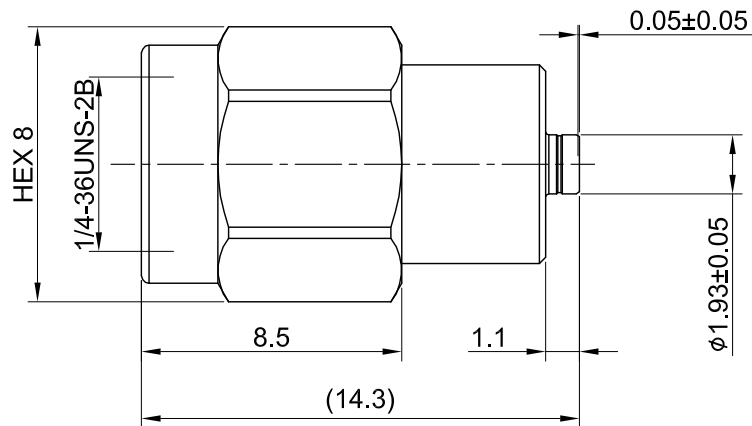

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC ~ 9GHz
 IMPEDANCE : 50Ω
 VSWR : 1.2 MAX.
 WORKING VOLTAGE : AC 60V
 WITHSTANDING VOLTAGE : AC 200V
 INSULATION RESISTANCE : 500 MΩ MIN

08	BODY B	STAINLESS STEEL	PASSIVATED	1	TITLE SMA Straight Plug to U.FL / I-PEX Jack Adaptor																	
07	BODY A	BRASS	GOLD	1																		
06	INSULATOR B	TEFLON	NONE	1	DWG NO. C0A003F0140-01																	
05	PIN	BRASS	GOLD	1																		
04	INSULATOR A	TEFLON	NONE	1	CUST. P/N: N/A DWG NO: N/A																	
03	INNER RETAINING RING	STAINLESS STEEL	NONE	1																		
02	GASKET	SILICONE RUBBER	RED	1	<table border="0"> <tr> <td>GENERAL TOLERANCES</td> <td>DRAWN BY: Lottie</td> <td>2024/01/05</td> </tr> <tr> <td>.X ±0.2</td> <td>CHK'D BY: Kana</td> <td>2024/01/05</td> </tr> <tr> <td>.XX ±0.2</td> <td></td> <td></td> </tr> <tr> <td>.XXX ±0.2</td> <td></td> <td></td> </tr> <tr> <td>ANGLES N/A</td> <td></td> <td></td> </tr> </table>			GENERAL TOLERANCES	DRAWN BY: Lottie	2024/01/05	.X ±0.2	CHK'D BY: Kana	2024/01/05	.XX ±0.2			.XXX ±0.2			ANGLES N/A		
GENERAL TOLERANCES	DRAWN BY: Lottie	2024/01/05																				
.X ±0.2	CHK'D BY: Kana	2024/01/05																				
.XX ±0.2																						
.XXX ±0.2																						
ANGLES N/A																						
01	SHELL	BRASS	GOLD	1	<table border="0"> <tr> <td>REV.</td> </tr> <tr> <td>2.10</td> </tr> </table>			REV.	2.10													
REV.																						
2.10																						
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY	SHEET 1 of 1	Unit: mm																