


REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2017/06/14
1.10	NEW DRAWING FRAME	2023/10/30

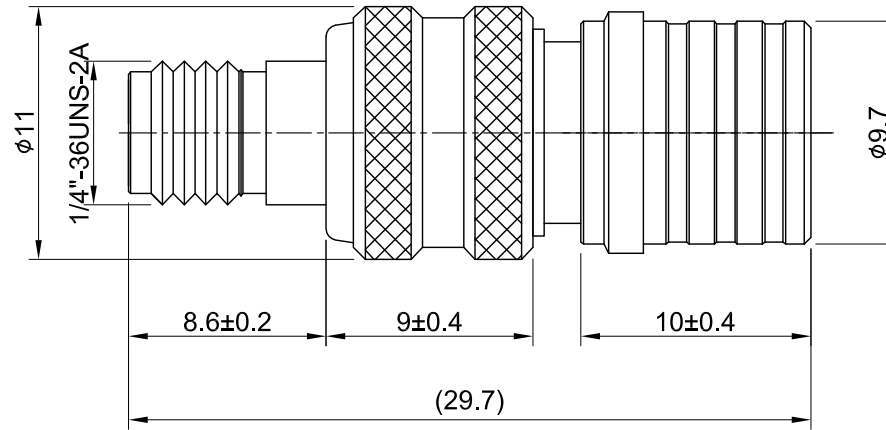

MECHANICAL DATA
 DURABILITY : 100 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHz
 IMPEDANCE : 50Ω
 VSWR : 1.2 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1000V
 INSULATION RESISTANCE : 5000 MΩ MIN

09	INSULATOR B	TEFLON	NONE	1
08	BODY D	BRASS	NICKEL	1
07	CENTER PIN	P.BRONZE	GOLD	1
06	BODY C	BRASS	NICKEL	1
05	INSULATOR A	TEFLON	NONE	1
04	O RING	SILICONE RUBBER	RED	1
03	BODY B	BRASS	NICKEL	1
02	BODY A	BRASS	NICKEL	1
01	SHELL	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		SMA(F) to QMA(M) adaptor, nickel, 6GHz	
DWG NO.		C0A003F0261-01	
CUST. P/N: N/A		DWG NO: N/A	
SHEET 1 of 1		Unit: mm	
GENERAL TOLERANCES		DRAWN BY: Kelly 2023/10/30	
.X ±0.2		CHK'D BY: Eileen 2023/10/30	
.XX ±0.2		REV.	
.XXX ±0.2		DA2310300005	
ANGLES N/A		1.10	

