


REV	DESCRIPTION	DATE
2.00	UPDATE DRAWING	2019/10/24
2.10	NEW DRAWING FRAME	2024/03/27

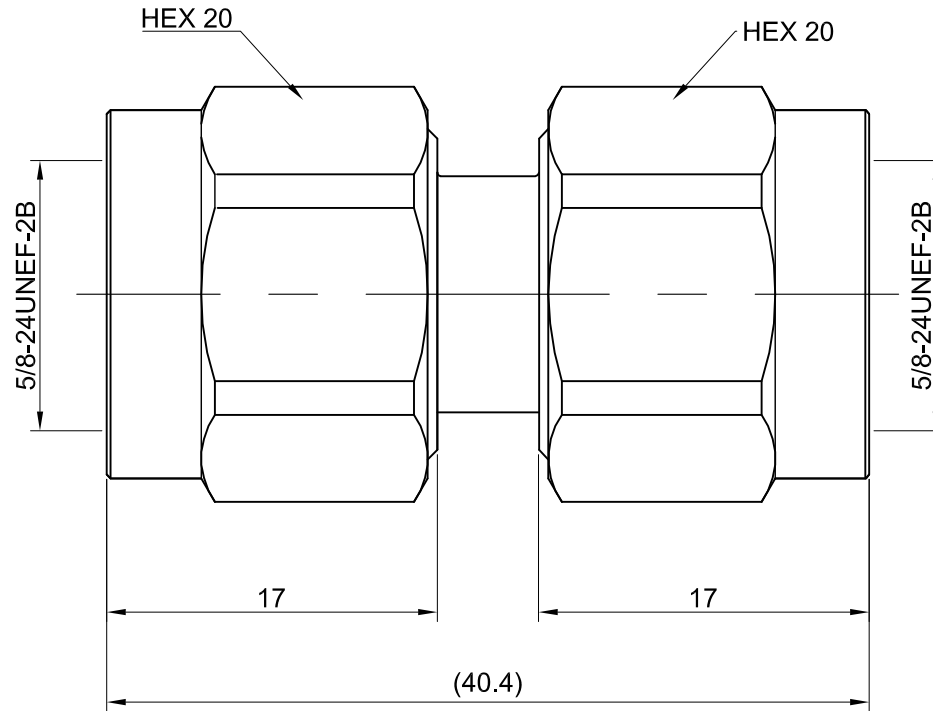

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~18GHz
IMPEDANCE : 50Ω
VSWR : 1.2 MAX.
WORKING VOLTAGE : AC 1000V
WITHSTANDING VOLTAGE : AC 1500V
INSULATION RESISTANCE : 5000 MΩ MIN

07	BODY B	BRASS	NICKEL	1
06	SHELL	BRASS	NICKEL	2
05	INNER RETAINING RING	BRASS	NONE	2
04	GASKET	SILICONE RUBBER	RED	2
03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR	TEFLON	NONE	2
01	BODY A	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/03/27	
N(M) to N(M) st. adaptor, 18GHz		CHK'D BY: Dora		2024/03/27	
DWG NO. C0A003F2727-02		REV.		2.10	
CUST. P/N: N/A		DRAWN BY: Kelly		2024/03/27	
DWG NO: N/A		CHK'D BY: Dora		2024/03/27	
SHEET 1 of 1		Unit: mm		DA2403110012	



GENERAL TOLERANCES		DRAWN BY: Kelly		2024/03/27	
.X	±0.2	CHK'D BY: Dora		2024/03/27	
.XX	±0.2	REV.		2.10	
.XXX	±0.2	DA2403110012			
ANGLES	N/A				