


REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2024/12/13

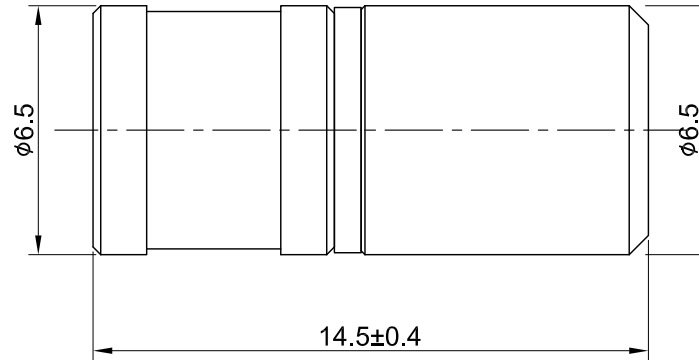

MECHANICAL DATA  
 DURABILITY : 500 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~4GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.3 MAX.  
 INSULATION VOLTAGE : AC 500V  
 RATED DISSIPATION : 0.5W  
 INSULATION RESISTANCE : 1000 MΩ MIN

07	RETAINING HOLDER	BRASS	GOLD	1
06	TRIMMABLE CHIP RESISTOR	NONE	NONE	2
05	CENTER PIN	Be.Cu	GOLD	1
04	INSULATOR	TEFLON	NONE	1
03	BODY	BRASS	GOLD	1
02	INNER RETAINING RING	Be.Cu	GOLD	1
01	SHELL	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/12/13
SMB(M) st. terminator, 50ohm, 0.5W, 4GHz		CHK'D BY: Chili		2024/12/13
DWG NO. C99AA3F22		REVISIONS		REV. 1.00
CUST. P/N: N/A DWG NO: N/A		DA2412130005		
SHEET 1 of 1		Unit: mm		



GENERAL TOLERANCES		DRAWN BY: Kelly		2024/12/13
.X	±0.2	CHK'D BY: Chili		2024/12/13
.XX	±0.2	REVISIONS		REV. 1.00
.XXX	±0.2	DA2412130005		
ANGLES	N/A			